

Microwave Sensor Fitting Instructions


The high bay light is supplied ready to install the optional plug-and-play Microwave Sensor (model: HB-MMS-ANT54T) into the face of the high bay. To install the sensor, please follow these simple instructions:

- Remove the rubber grommet in the centre of the face of the High Bay Light
- Align the Microwave Sensor into the socket and push into place
- Turn the sensor clockwise to secure the sensor in place.

The sensor program default is as follows:

Sensitivity: 100%
Hold Time: 5 minutes
Daylight Sensor: Disabled
Stand-By DIM level: 30%
Stand-By Period: 60 minutes

To change the settings of the sensor, you require the optional remote control model HB-RC100 to program your required settings.

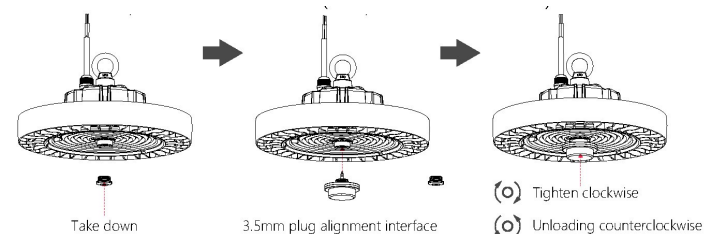

Please read these instructions carefully in full prior to carrying out the installation.


IMPORTANT SAFETY ISSUES

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure that the AC power is disconnected at the switchboard and test to ensure that there is no power on the circuit prior to starting installation.
- This product is rated to IP65 and is suitable for damp environments.
- Modification of this product will void any warranty.
- When cleaning or replacing the light, please ensure the power is off and the light is completely cooled down. Cleaning can be done using a soft cloth and PH neutral detergent.

INSTALLATION INSTRUCTIONS

- Disconnect the power at the switchboard.
- Ensure an AC socket or outdoor junction box is installed within 1500mm of the lights position.
- Select your required wattage, the default setting is 200w. To change the setting remove grommet from the side of the driver and change switch setting as per the chart below. The rubber grommet MUST be re-installed to ensure IP and dust rating for this driver. Warranty is void if this is missing.
- Mount the light as required through the eye bolt.
- For installation of the microwave sensor please see the back page of this document.
- Plug in the AC cable into the surface mount socket or terminate into the junction box.
- Check all connections are correct.
- Turn power back on at the switchboard and test the lights operation.

Watt Select Settings



Default

➡ A = 200w
B = 150w
C = 100w