

Product Specification



G2 Surface Mount Batten
Low Glare UGR<19



Product Features

- 1183mm (4ft)
- 3 Wattage Selectable (20w/30w/40w)
- 3 Colour Adjustable (4000K/5000K/6000K)
- Steel Base with PC Lens
- 80° Beam Angle
- Low Glare UGR<19
- IP20 Housing
- IK08 Impact Rating
- Weight: 1.1kg

Specification Overview



Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
SMD-4FT-UGR	20w/30w/40w	220~240VAC	4000K/5000K/6000K	3724~3800lm	80°	White	1183x67x73mm

G2 Surface Mount Batten

Low Glare UGR<19

Model	Power	Lumens (40w setting)	CCT	Dimension (W x H x D)	Weight
-------	-------	-------------------------	-----	--------------------------	--------

SMD-4FT-UGR

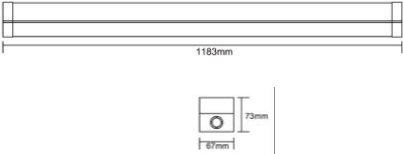
20w/30w/40w

3724~3800lm

4000K/5000K/6000K

1283 x 67 x 73mm

1.1kg

Specification				Dimensions
CCT	4000K/5000K/6000K (selectable)	Housing	Steel	
Efficacy	>93lm/w	Lens	Polycarbonate	
CRI (%)	≥80	Housing Colour	White	
Beam Angle	80°	Lifespan	>54,000 hours	
Power Input	220~240VAC	Operation Temperature	-20 °C to +45°C	
Dimmable	No			
Impact Rating	IK08			
Protection Rating	IP20	Warranty	3 Years	