

Product Specification




G2 Surface Mount Batten 4FT Standard



Product Features

- 36w, 30w, 20w selectable
- 4 Colour Adjustable (3000K/4000K/5000K/6000K)
- Sensor Ready*
- Steel Base with PC Lens
- 120° Beam Angle
- IP20 Housing
- IK08 Impact Rating
- Weight: 1.6kg

Options:



Dimmable Fitting



Motion Sensor Fitting



Sensor and Emergency Fitting



Emergency Fitting

* Plug-in Microwave Sensor can be installed in Sensor Ready Battens from batch numbers >E06



Specification Overview



COLOUR SELECT



WATT SELECT



Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
SMD-4FT-4CWS	36w/30w/20w	220~240VAC	3000K/4000K/ 5000K/6000K	4140~4533lm (36w)	120°	White	1200x60x65mm



G2 Surface Mount Batten 4FT Standard

Model	Power	Lumens	CCT	Dimension (L x W x H)	Weight
-------	-------	--------	-----	-----------------------	--------

SMD-4FT-4CWS	36w-30w-20w	4140~4533lm (36w)	3000K/4000K/5000K /6000K	1200 x 60 x 65mm	1.6kg
--------------	-------------	----------------------	-----------------------------	------------------	-------

Specification				Dimensions
---------------	--	--	--	------------

CCT	30000K/4000K/5000K/6000K (selectable)	Housing	Steel
Efficacy	>115lm/w	Lens	Polycarbonate
CRI (%)	≥80	Housing Colour	White
Beam Angle	120°	Lifespan	>54,000 hours
Power Input	220~240VAC	Operation Temperature	-20 °C to +45°C
Dimmable	No	Motion Sensor	Optional*
Impact Rating	IK08	Emergency	No
Protection Rating	IP20	Warranty	5 Years



* Plug-in Microwave Sensor can be installed in Sensor Ready Battens from batch numbers >E06

Optional – Plug-in Microwave Motion Sensor




Model: SMD-MMS

The plug-in microwave sensor can be installed into the fitting by removing the cover plate and securing the sensor onto the rear of the light head. To connect the sensor, locate the sensor cable from the driver and plug-in for it to become a sensor fitting.

These are the optional settings of the sensor, the ones highlighted in grey represent the factory default.

Detection Area	Hold Time	Daylight Sensor	Standby DIM Level	Standby Period
100%	5 s	Disabled	0%	∞
50%	60 s	On	20%	15mins
	3 mins			
	10 mins			

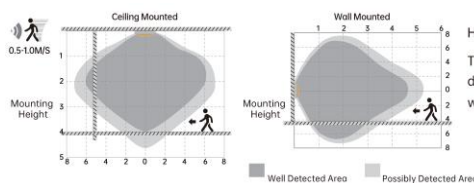

Highest mounting height is 4m
This figure indicates the maximum distance at the highest mounting height with 100% sensitivity.

Specifications are subject to change without notice