



Aluminium Housing



Polycarbonate Housing

STRONG WP Series



COLOUR SELECT



WATT SELECT

Product Features

- Vandal Proof Security Batten
- 10w / 20w Dual Power Selectable
- 3 colours in one: 3000K, 4000K, 5000K (switch select)
- Flicker Free Driver
- Aluminium base with PC diffuser (AU) or Polycarbonate base and diffuser (PC)
- 120° Beam Angle
- IP66, IK10 Housing
- Weight: 1.5kg (AU), 1.3kg (PC)

Options:



Emergency Pack



PC Model



AU Model




N14256



5627

| Model | Watt | Size | CCT | Lumens | Beam Angle | Trim Colour | Weight |
|--------------|---|------------------|-----------------|-------------|------------|-------------|--------|
| WP-STR2FT-AU | 10/20w | 600 x 70 x 90mm | 3000-4000-5000K | 1150~2600lm | 120° | Grey | 1.5kg |
| WP-STR2FT-PC | 10/20w | 675 x 96 x 116mm | 3000-4000-5000K | 1150~2600lm | 120° | Grey | 1.3kg |
| WP-STR-EM | Emergency Pack (requires installation into fitting) | | | | | | |

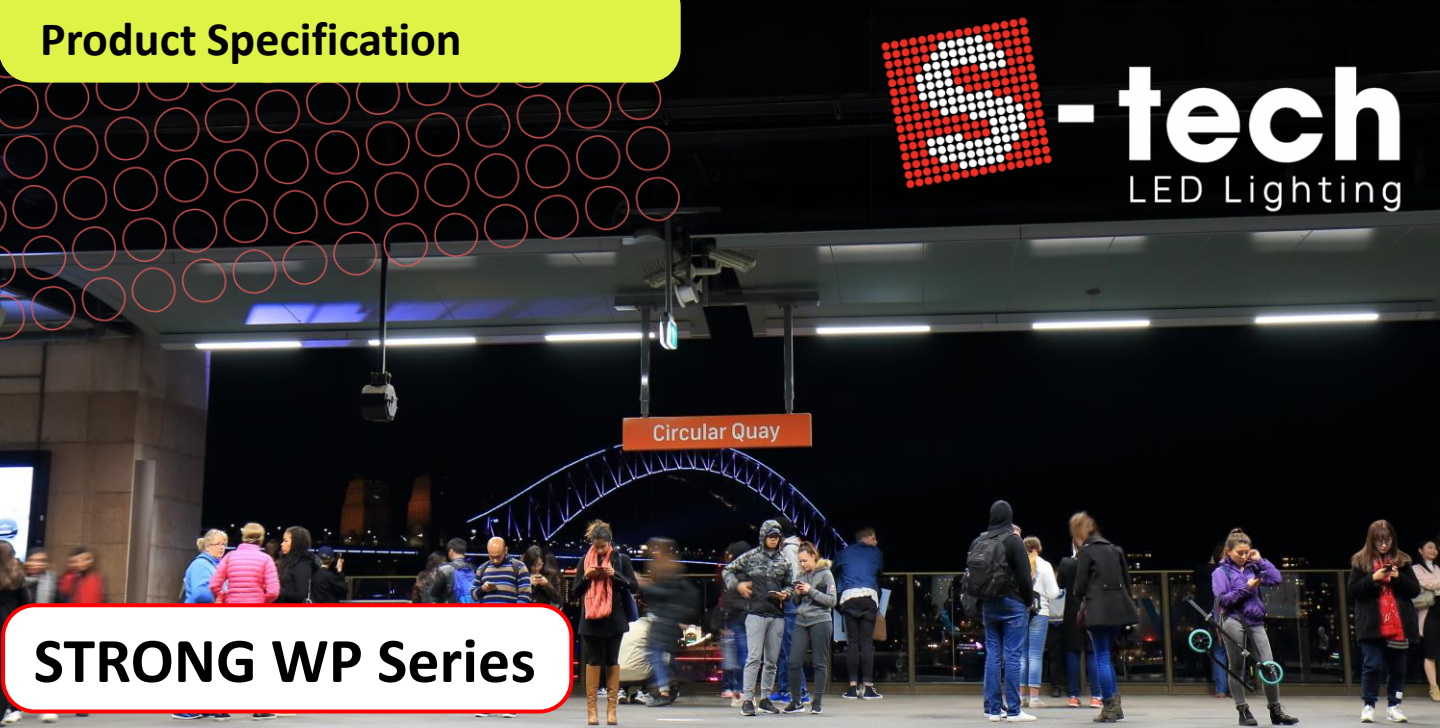

STRONG WP Series

Specification

| Model | WP-STR2FT-AU | WP-STR2FT-PC |
|---------------------------|---------------------------------|---------------------------------|
| Colour Temperature (3CCT) | 3000K / 4000K / 5000K | |
| Lumen (lm) | 2300~2600lm (20w) | |
| Efficiency (lm/w) | >115lm/w | |
| Light Source | LED | |
| CRI (%) | ≥80 | |
| Beam Angle | 120° | |
| Power Requirement | 200~240VAC | |
| Power Consumption | 10w / 20w | |
| Dimmable | No | |
| Housing | Aluminium Base with PC Diffuser | Polycarbonate Base and Diffuser |
| Housing Colour | Grey | |
| Lifespan | >60,000 hours | |
| Operation Temperature | -20°C~+50°C | |
| Product Dimension | 600 x 70 x 90mm | 675 x 96 x 116mm |
| Impact Rating | IK10 | |
| Weight | 1.5kg | 1.3kg |
| Protection Rating | IP66 | |
| Warranty | 5 Years | 3 years |

Specifications are subject to change without notice