

Dimmer Series – Rotary Dimmer Switch

Product Features

- Rotary Dimmer with push ON/OFF
- Soft Start
- Fits most standard wall plates (excludes Clipsal Iconic)
- No Neutral Required
- Load: Min 5w / Max 350w
- Adjustable Min/Max dimming levels
- Multi-way switching compatible
- Refer to below for dimmer configuration




Options:



Black Knob



Load Correction Device

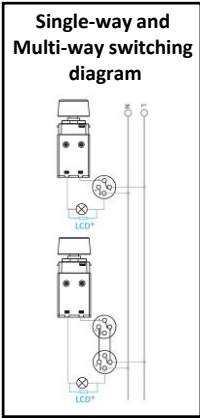

Function	Setup
Disable Push Button	Short press the dimmer rotary knob 7 times
Enable Push Button (default)	Short press the dimmer rotary knob 5 times
Brightness adjustment – Minimum	Use the left hand adjusting trim pot on the body of the dimmer to adjust the desired minimum brightness level
Brightness adjustment – Maximum	Use the right hand adjusting trim pot on the body of the dimmer to adjust the desired maximum brightness level



Specification Overview

Model	Type	Dimming Mode	Size	Max Load	Min Load	Comments
DIM-R	Rotary	Trailing Edge	56.1 x 23 x 23.1mm	350w	5w	<u>Not</u> suitable for multi-way dimming
DIM-R-BK	Matt Black Knob to suit DIM-R Dimmer					
DIM-LCD	Load Correction Device					

Used to reduce dimming issues/flickering