

Product Specification



s-tech
LED Lighting

G3 Weatherproof Batten

Turtle Safe/Bug Free/Eyewash



Product Features

- Available in Standard or Emergency Models
- 10w / 20w Dual Power Selectable
- 600mm
- 2 colour Adjustable (Amber/Green)
- Amber = Turtle Friendly/Bug Free* / Green = Eye Wash
- Emergency Model: Maintained/Non-Maintained
- Ø20mm Conduit Entry
- 110° Beam Angle
- PC Base and Lens
- 600 x 95 x 80mm
- IP65 Housing
- IK08 Impact Rating
- Weight: 820g (Std), 1.3kg (Em)

Options:

- Standard Fitting
- Emergency Fitting
- Pole Bracket

* Whilst our testing using an amber light source has found it will attract approximately 90% less bugs than alternate light sources, there is still a risk of some bugs being attracted to our bug free lighting products.



Specification Overview

Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
WP-2FTG3-TLG	10/20w	200~240VAC	Amber / Green	2000~2200lm	110°	Grey	600x95x80mm
WP-2FTG3-TLG-E		Emergency Version					
WP-G3-PB			Pole Brackets to suit G3 battens – set of 2pcs – Fits 26~42mm OD pole – PC Black				



Product Specification



G3 Weatherproof Batten


2FT Standard TLG

Switch to Excellence

Model	Power	Lumens	CCT	Dimension (W x H x D)	Weight
-------	-------	--------	-----	-----------------------	--------

WP-2FTG3-TLG	10w/20w	2000~2200lm (20w)	Amber/Green	600 x 95 x 80mm	820g
--------------	---------	-------------------	-------------	-----------------	------

Specification				Dimensions
CCT	Amber / Green (selectable)	Housing	Polycarbonate	
Efficacy	>100lm/w	Lens	Polycarbonate	
CRI (%)	≥80	Housing Colour	Grey	
Beam Angle	110°	Lifespan	>54,000 hours	
Power Input	200~240VAC, flicker free	Operation Temperature	-20 °C to +50°C	
Dimmable	No	Motion Sensor	No	
Impact Rating	IK08			
Protection Rating	IP65	Warranty	5 Years	

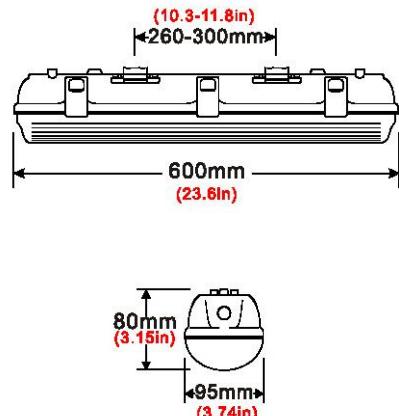

Options



Pole Bracket Kit

Model: WP-G3-PB

Specifications are subject to change without notice

Product Specification





G3 Weatherproof Batten 2FT Emergency TLG



Model	Power	Lumens	CCT	Dimension (W x H x D)	Weight
-------	-------	--------	-----	--------------------------	--------

WP-2FTG3-TLG-E	10w/20w	2000~2200lm (20w)	Amber/Green	600 x 95 x 80mm	1.3kg
----------------	---------	-------------------	-------------	-----------------	-------

Specification				Dimensions
CCT	Amber / Green (selectable)	Housing	Polycarbonate	
Efficacy	>100lm/w	Lens	Polycarbonate	
CRI (%)	≥80	Housing Colour	Grey	
Beam Angle	110°	Lifespan	>54,000 hours	
Power Input	200~240VAC, flicker free	Operation Temperature	-20 °C to +50°C	
Dimmable	No	Emergency	5w, 90 min run-time	
Impact Rating	IK08	Type	Maintained or Non-Maintained	
Protection Rating	IP65	Warranty	5 Years Light, 3 Years Battery	

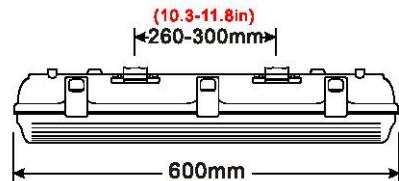

Options



Pole Bracket Kit

Model: WP-G3-PB

Specifications are subject to change without notice