

Product Specification



S-tech
LED Lighting

G3 Weatherproof Batten

Turtle Safe/Bug Free/Eyewash



Emergency


Emergency eye wash



Product Features

- Available in Standard or Emergency Models
- 20w / 40w Dual Power Selectable
- 1200mm
- 2 colour Adjustable (Amber/Green)
- Amber = Turtle Friendly/Bug Free* / Green = Eye Wash
- Emergency Model: Maintained/Non-Maintained
- Ø20mm Conduit Entry
- 110° Beam Angle
- PC Base and Lens
- 1200 x 95 x 80mm
- IP65 Housing
- IK08 Impact Rating
- Weight: 1.65kg (Std), 2.25kg (Em)

Options:

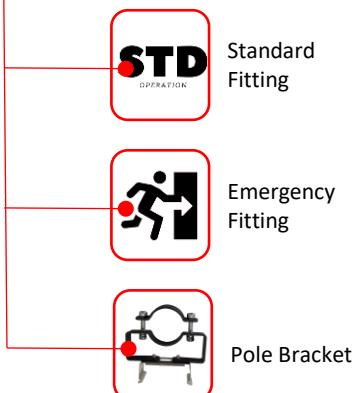

TURTLE SAFE BUG FREE EYEWASH LIGHT

* Whilst our testing using an amber light source has found it will attract approximately 90% less bugs than alternate light sources, there is still a risk of some bugs being attracted to our bug free lighting products.

Specification Overview



Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
WP-4FTG3-TLG	10/20w	200~240VAC	Amber / Green	4000~4400lm	110°	Grey	1200x95x80mm
WP-4FTG3-TLG-E		Emergency Version					
WP-G3-PB			Pole Brackets to suit G3 battens – set of 2pcs – Fits 26~42mm OD pole – PC Black				

Product Specification




G3 Weatherproof Batten

4FT Standard TLG

Switch to Excellence

Model	Power	Lumens	CCT	Dimension (W x H x D)	Weight
-------	-------	--------	-----	-----------------------	--------

WP-4FTG3-TLG	20w/40w	4000~4400lm (40w)	Amber/Green	1200 x 95 x 80mm	1.65kg
--------------	---------	-------------------	-------------	------------------	--------

Specification				Dimensions
CCT	Amber / Green (selectable)	Housing	Polycarbonate	
Efficacy	>100lm/w	Lens	Polycarbonate	
CRI (%)	≥80	Housing Colour	Grey	
Beam Angle	110°	Lifespan	>54,000 hours	
Power Input	200~240VAC, flicker free	Operation Temperature	-20 °C to +50°C	
Dimmable	No	Motion Sensor	No	
Impact Rating	IK08			
Protection Rating	IP65	Warranty	5 Years	<small>* Whilst our testing using an amber light source has found it will attract approximately 90% less bugs than alternate light sources, there is still a risk of some bugs being attracted to our bug free lighting products.</small>

Options



Pole Bracket Kit

Model: WP-G3-PB

Specifications are subject to change without notice

Product Specification



G3 Weatherproof Batten 4FT Emergency TLG



Model	Power	Lumens	CCT	Dimension (W x H x D)	Weight
-------	-------	--------	-----	--------------------------	--------

WP-4FTG3-TLG-E	20w/40w	4000~4400lm (40w)	Amber/Green	1200 x 95 x 80mm	2.25kg
----------------	---------	-------------------	-------------	------------------	--------

Specification				Dimensions
CCT	Amber / Green (selectable)	Housing	Polycarbonate	
Efficacy	>100lm/w	Lens	Polycarbonate	
CRI (%)	≥80	Housing Colour	Grey	
Beam Angle	110°	Lifespan	>54,000 hours	
Power Input	200~240VAC, flicker free	Operation Temperature	-20 °C to +50°C	
Dimmable	No	Emergency	5w, 90 min run-time	
Impact Rating	IK08	Type	Maintained or Non-Maintained	
Protection Rating	IP65	Warranty	5 Years Light, 3 Years Battery	

* Whilst our testing using an amber light source has found it will attract approximately 90% less bugs than alternate light sources, there is still a risk of some bugs being attracted to our bug free lighting products.

Options



Pole Bracket Kit
Model: WP-G3-PB

Specifications are subject to change without notice