



**HALO
OYSTER LIGHT
SET-UP GUIDE**

What's in the Box



- S-HALO OYSTER LIGHT SET-UP GUIDE


Get Ready

- Know your Wi-Fi network and password
- Make sure your mobile device is running iOS 13.3 or higher and Android 9.0 or higher
- Make sure you're connecting to a 2.4GHz Wi-Fi network (The Smart oyster light can't connect to 5GHz networks)


Attention

1. Do handle carefully in transportation.
2. Do not disassemble the fixture for non-professional.
3. The fixture work under AC high voltage and current, it should be installed where can't be touched easily. The connection must be completely sealed and be earthed.
4. the external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
5. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similarly qualified person.
6. The surface where it's positioned must be firm enough to ensure safety
7. Ensure the voltage of the electricity system is in the range of working voltage for the fixture. Otherwise, lifetime of fixtures will be influenced.
8. Installation and maintenance should be operated by a professional.

Installation diagram

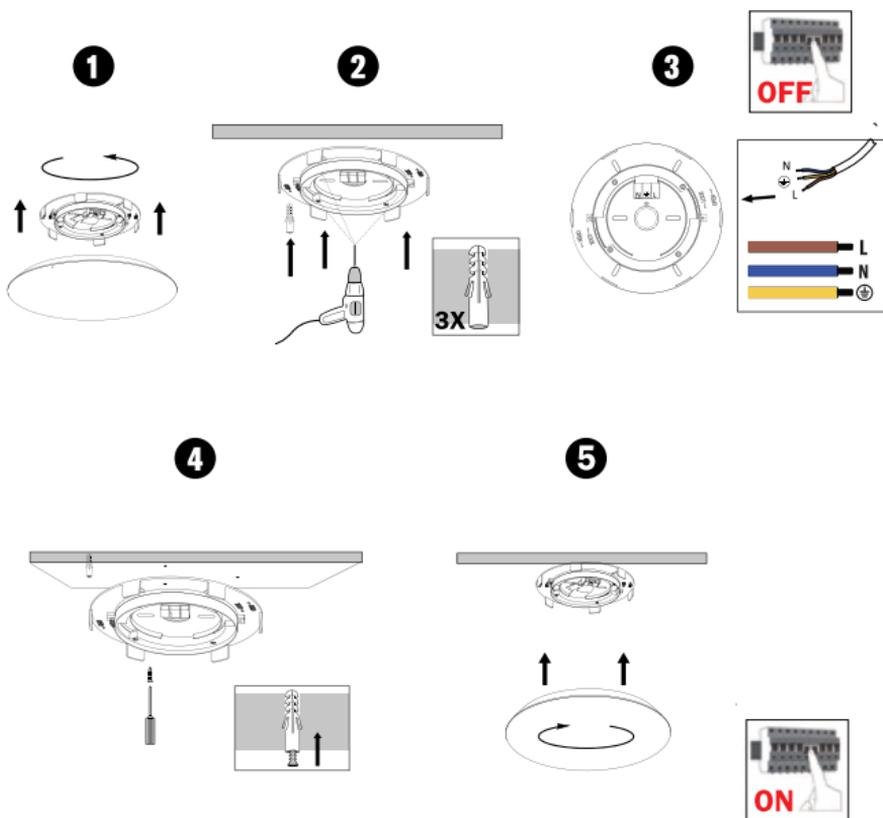

1 Download the Tuya Smart App

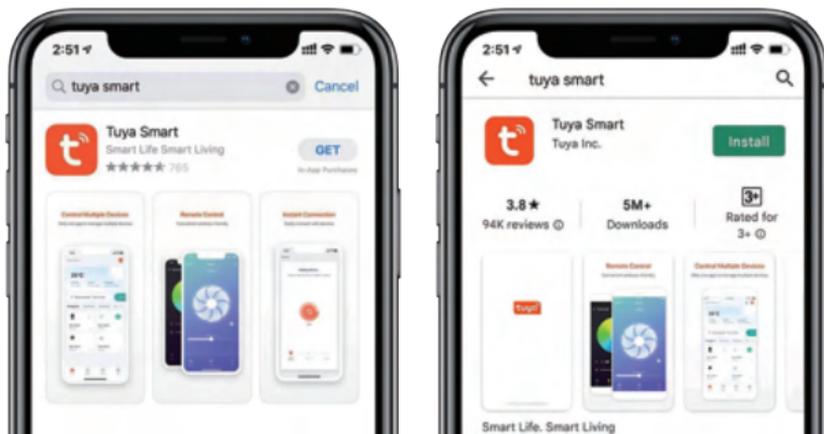

2 Register a Tuya Smart account

A screenshot of the 'Register' screen in the Tuya Smart app. It shows a back arrow at the top left, the title 'Register', a country selection dropdown set to 'United Kingdom +44', an email input field containing 'your_name@youremail.com.au', and a red button labeled 'Get Verification Code'.


Enter your mobile phone number or email address.

A screenshot of the 'Log In' screen in the Tuya Smart app. It shows a back arrow at the top left, the title 'Log In', a country selection dropdown set to 'United Kingdom +44', an email input field containing 'your_name@youremail.com.au', a password input field with masked characters, and a red button labeled 'Log In'. At the bottom, there are links for 'Login with SMS' and 'Forgot Password'.

Log into the App.

Note: Please select your region and country.

3 Connect: Easy Mode

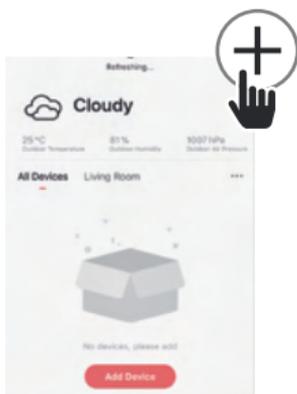


STEP 1

Open the Tuya Smart App. In the top corner of the Devices screen, click (+).



STEP 2

Choose "Light Source(BLE+Wi-Fi)". Select upper right corner "EZ Mode"

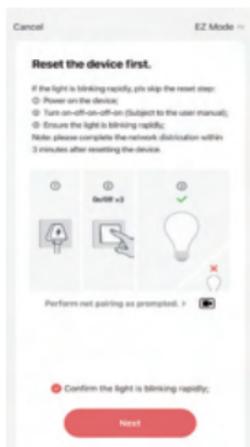


STEP 3

Make sure light is rapidly flashing white.

If not, reset to reach Easy Mode to connect.

Press "Next" in the App.

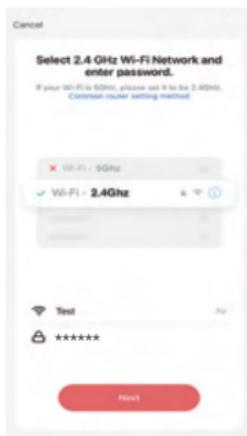

STEP 4

Enter your Wi-Fi network and password.




STEP 5

The Tuya Smart App will connect to your devices.


**NOTE: The Smart oyster light can't connect to 5GHz networks.
*If the connection fails, try to connect using AP Mode.**

4 Connect: AP Mode

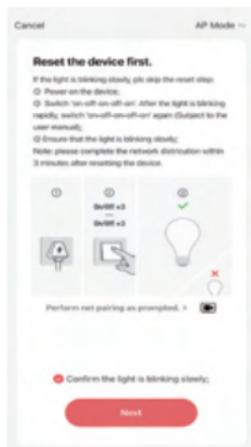

STEP 1

Open the Tuya Smart App. In the top corner of the Devices screen, click (+). Choose "Light Source(BLE+Wi-Fi)". Select upper right corner "AP Mode"

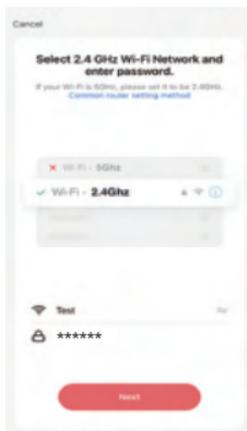


STEP 2

Make sure light is slowly flashing white. If not, reset to reach AP mode.




STEP 3

Press "Next" and enter your Wi-Fi details.

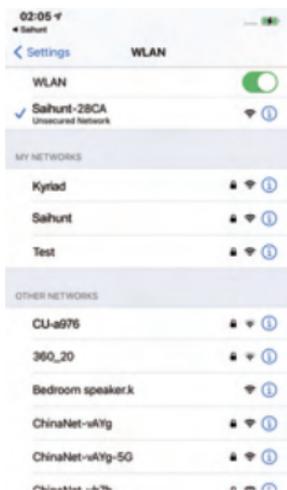

STEP 4

Follow the instructions to choose the device from your Wi-Fi list.

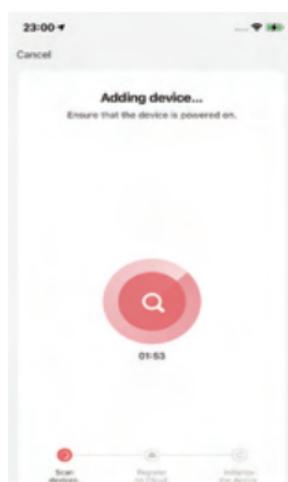

STEP 5

The Tuya Smart App will connect to your devices .

**NOTE: The Smart oyster light can't connect to 5GHz networks.
*If the connection fails, try to connect using AP Mode.**

5 Connect: Bluetooth

STEP 1

Open the Tuya Smart App. In the top corner of the Devices screen, click (+). Choose "Light Source(BLE+Wi-Fi)". Select upper right corner "Bluetooth"

STEP 2



Make sure light is rapidly flashing white. If not, reset to reach Easy Mode to connect. Press "Next" in the App.

STEP 3

Enter your Wi-Fi network and password.



Please follow the application guidelines for the next steps.
If you have any questions, please contact us in time.

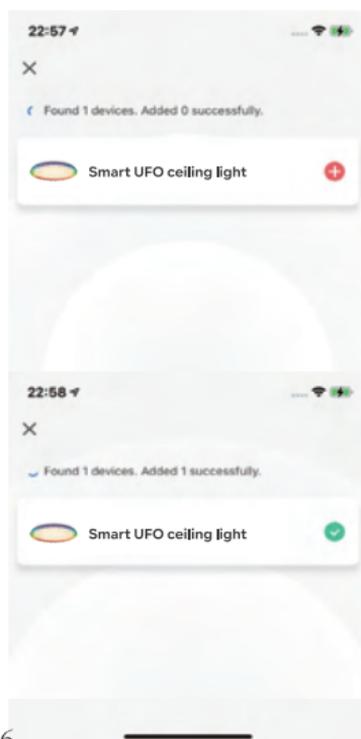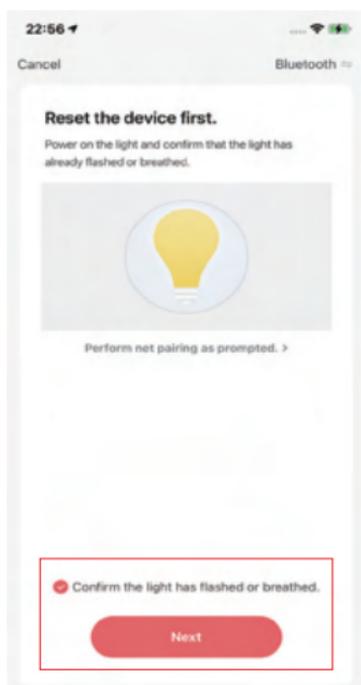

Frequently Asked Questions

1. Can I share with family and friends?

Yes, you can share access to your Switch and any other S-tech device. In the Tuya Smart App, press the “Profile” button and click on “Device Sharing” to give or revoke sharing permissions. In order to share, the other user should already have downloaded the Tuya Smart App and registered an account.

2. Can I group multiple S-tech devices together?

Yes, you can group multiple same-type devices by room, location, or however else you want. The same devices can be in multiple groups. For example, if you create a group for “Bedroom” and another group for “Entire House”, your Bedroom lights can be included in both groups. From your main device list, click on one of the devices you want to group, press the “⋮” button on the top right for advanced settings, and click “Create Group”. You’ll be able to name a new group and choose which devices you’d like to group together.

3. How many devices can I control?

Tuya Smart App can control an unlimited amount of devices in an unlimited amount of locations. Your router may have a limit of how many devices can be connected to one router.

4. My S-tech device has a funny name. How do I rename it?

From your main device list, click on one of the devices you want to rename, press the “⋮” button on the top right for advanced settings, and click “Modify Device Name” (or “Modify Group Name”). You’ll then be able to choose a more familiar name.

5. What should I do if the device Appears offline or is unreachable?

Make sure your Wi-Fi router is online and in range, and check that you have the latest Tuya Smart functionality by clicking “Check for firmware update” in your device settings. If power is connected but the switch is not responding, hold down the Restart button to cycle the fuse and give the switch a jump start.

6. What’s the wireless range?

The range of your home Wi-Fi is heavily dependent on your home router and the conditions of the room. Check with your router specifications for exact range data.

7. If my Wi-Fi internet goes down, will Tuya Smart App still work?

S-tech products need to be connected to Wi-Fi in order to use them remotely.

8. What does the white light mean?

The white light indicates power. If the white light is on, the switch is receiving power; if it is off, it is not receiving power. The white light also indicates connection. If it is solid, the switch is connected; if it is flashing quickly, the switch is ready to connect using the Easy Mode; if it is flashing slowly, the switch is ready to connect using the AP Mode.

9. What should I do,when I find a problem with the purchased product?

Contact S-Tech at

support@s-tech.com.au or 08 9330 8485

for technical assistance

Important Information

Troubleshooting

Cannot connect to your Wi-Fi network.

Make sure you entered the correct Wi-Fi password during the Wi-Fi setup. Check whether there are any Internet connection problems.

If the Wi-Fi signal is too weak, reset your Wi-Fi router and try again.

Reset the device

To reconnect to Wi-Fi, Reset the device through the wall switch, on-off-on-off-on.

- Reset once (press switch on-off-on-off-on) to reach Easy Mode, indicated by rapidly blinking white light. Refer to connect in Easy Mode.
- Reset again (press switch on-off-on-off-on) to reach AP Mode, indicated by slowly blinking white light. Refer to connect in AP Mode.

Technical Specifications

Category	Saihunt smart ceiling light
Model	OY-300-HALO
Size	φ300*48MM
Wattage	24W
Luminous flux	2100-2400LM
Beam angle	180°
Color temperature	2700~6500K+RGB HALO (rear)
Input Voltage	200-240VAC
Color rendering index	≥ 85
Working Temperature	-20 ~ +40°C
Operating life	25000H

- Wi-Fi: IEEE 802.11N, 2.4GHz (not compatible with 5GHz Wi-Fi networks)


Made in China

Support:

If you encounter any issues, please contact us at:

support@s-tech.com.au or 08 9330 8485

Remote control function

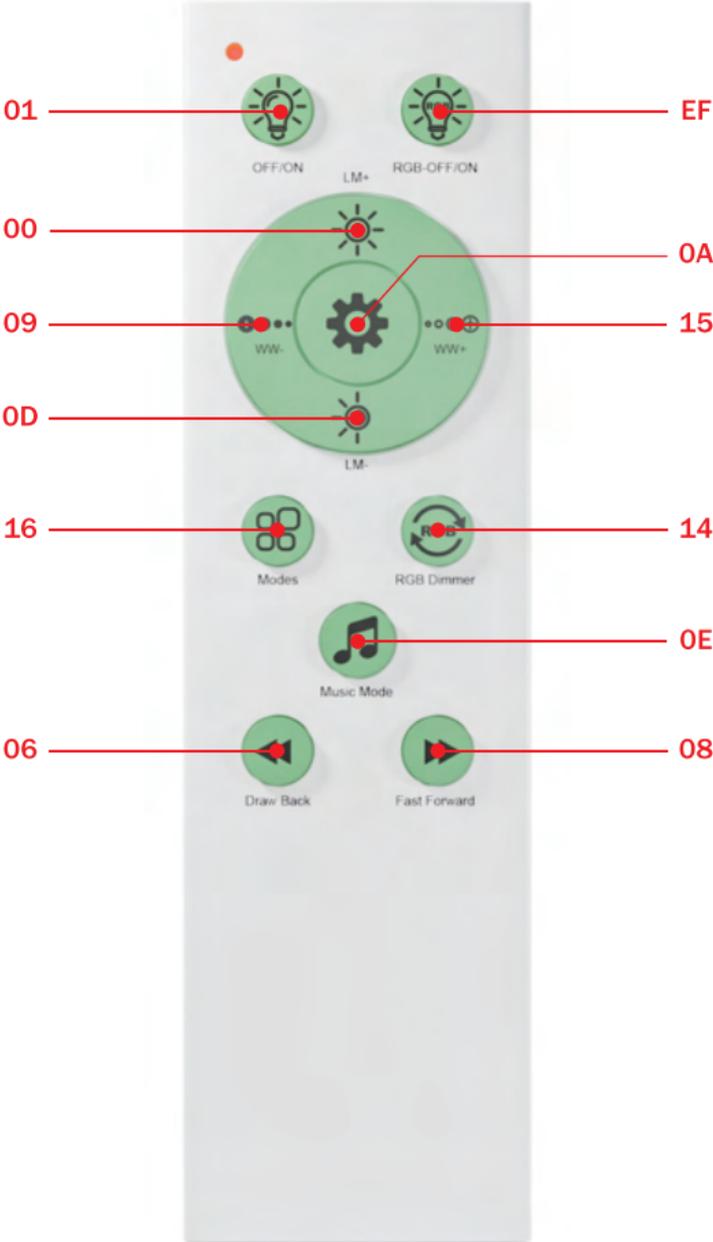

Remote control function

number	Function
01	White light switch
EF	RGB switch (press twice continuously) Initial lighting mode (phantom)
00	Brightness Adjustment (increase)
0D	Brightness Adjustment (decrease)
09	Colour Adjustment (warm)
15	Colour Adjustment (cool)
14	RGB color switching (red orange yellow green light blue pink)
16	Mode 1: Green Grass 2: Late Autumn 3: Night Flight 4: Wind Chime 5: ChristmasEve 6: Halloween 7: Dating 8: Thanksgiving 9: Forest Day 10: Football Day 11: Dreamland 12: Party
0E	Music Mode - Rock - Jazz - Classic - Rolling - Energy - Spectrum
06	Speed Adjustment (slow)
08	Speed Adjustment (fast)
0A	Remote control code matching - lamp powered on 5S - press and hold for 5 seconds to successfully match the code
0A+08	Press and hold 0A+08 for distribution network at any time when the lamp is powered on(The light will enter the fast flashing mode and then connect network)
0A+01	Press and hold the remote control key at the same time -decoding successful - the remote control cannot control the lamp-a new code verification is required

VOICE CONTROL GUIDE

Name and Control Each Device by Voice



Thank you for purchasing your S-tech smart product. Make sure your devices are already set up using the Tuya Smart App, then follow these steps.

Voice Control Quick Guide for Google Assistant



To control your smart switch or surge protectors, just say “OK Google”, and ask.

Make sure your devices are already set up using the Tuya Smart app.

Google Assistant

Things you can say* :

“Hey Google, turn on all the lights in my bedroom.”

“Hey Google, turn off the light.”

“Hey Google, set the bedroom light to orange.”


“Hey Google, turn off the coffee machine.”

“Hey Google, set the living room to 50%.”

“Hey Google, dim porch light.”

*Some commands require compatible devices.


- 1 Open the Google Home App and go to Home Control in the menu.

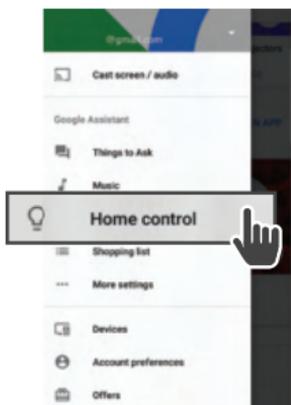

- 2 Tap the “+” button




- 3 Choose “Tuya Smart” in the list of Home Control partners.

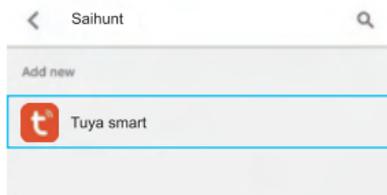

- 4 Authorize your account with Google Assistant using the username and password from your Tuya Smart app.

Now your Google Home app and S-tech devices are linked!

You're now able to say “OK Google” and control your S-tech devices.

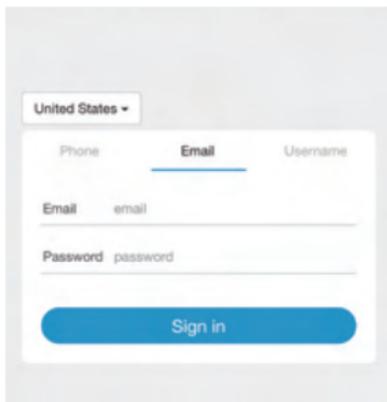

Note: Please select your region and country.

At any time, go into the “Home Control” section of the Google Home app to set nicknames and rooms for your devices.

You can rename your devices in the Tuya Smart app, and Google Assistant will refer to them by the same name.

So if you rename a smart bulb to “Living Room” or a nickname like “Blossom”, then Google Assistant will use that same name later on. You can always give it a nickname using the Google Home app as well.

You can also assign switch to a specific room, like “Bedroom” or “Kitchen”.

Google Assistant will be able to control devices by room.

Amazon Alexa



To control your smart switch or surge protectors, just ask Alexa.

Make sure your devices are already set up using the Tuya Smart app.

Things you can say* :

“Alexa, discover my devices.”

“Alexa, turn on the bedroom light.”

“Alexa, set the bedroom light to orange.”

“Alexa, turn off the coffee machine.”

“Alexa, set the living room to 50%.”



“Alexa, dim porch light.”

*Some commands require compatible devices.

There are 2 ways to enable " Tuya Smart " Skill:


Way 1:

1. Log in to Tuya Smart App, click your smart device click "✎" in top right corner
2. Click Alexa in Third-party Control.
3. Sign in with your Alexa account.

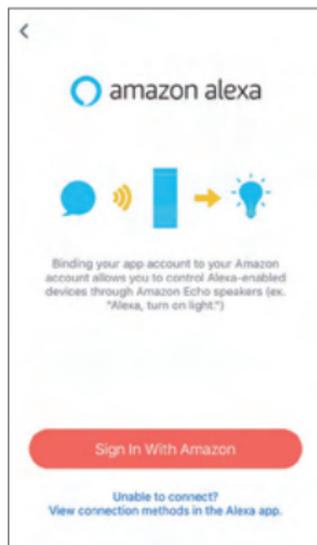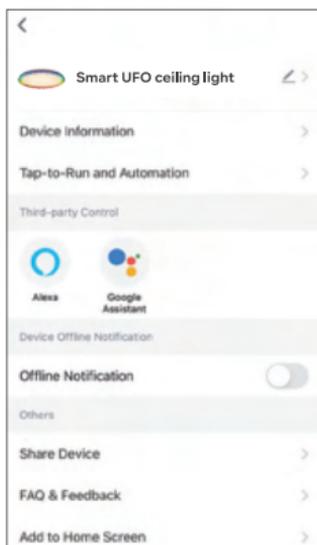


4. Click LINK.

5. Linked successfully, when add new device, it is no need to link again, just discover new device in Alexa.

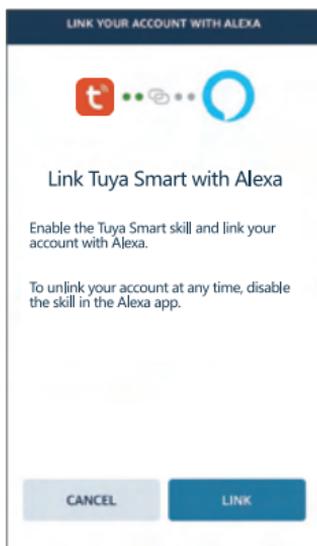


Way 2:


- 1 Open the Alexa App and go to Skills in the menu.

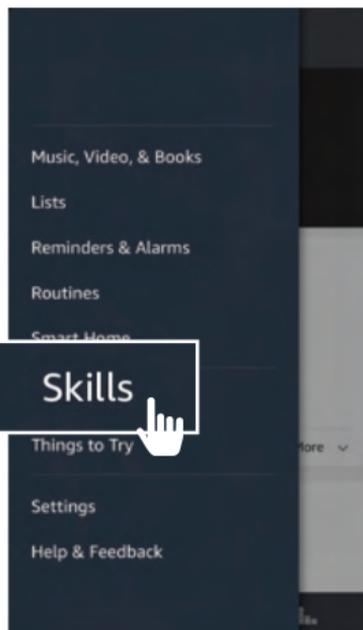

- 2 Search for Tuya Smart then click Enable.

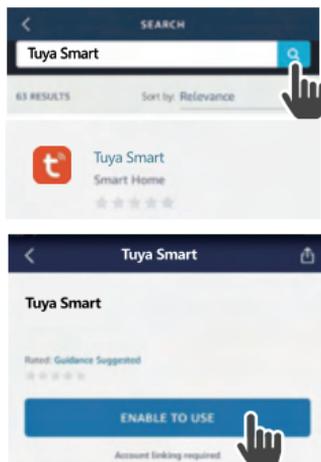


- 3 Authorize your account with Smart Home Skills using the username and password from your Tuya Smart App .

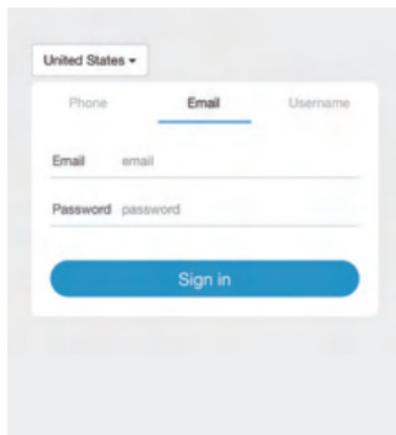

Note: Please select your region and country.

- 4 Choose “Discover Devices”. After a few seconds your S-tech devices will be displayed under Smart Home in the Alexa app.

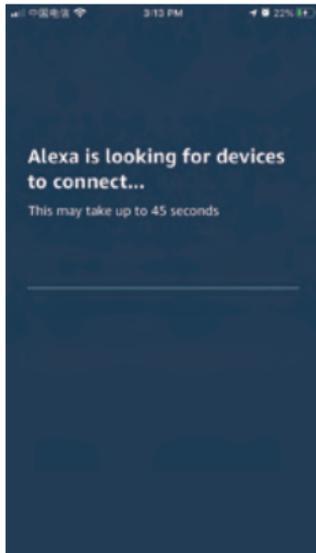

You can rename your devices in the Tuya Smart app, and Alexa will refer to them by the same name.

So if you rename a smart switch to “Living Room” or a nickname like “Blossom”, then Alexa will use that same nickname later on.

Alternatively, you create an Alexa group, like “Bedroom” or “Downstairs”, and add the device to the group.

Alexa will recognize the group name in the Alexa app, or the device name in the Tuya Smart app.

More information is available at:

<http://tinyurl.com/aexa-smart-home-groups>

If you have any questions about use and operation, you can contact us!

1. Customer Service Email:

www.s-tech.com.au

2. Contact Amazon sellers in Amazon mail for purchase or after-sales issues

After the customer places an order, there will be a "Contact seller" option on the page, mainly by sending an email to contact the seller, or on the product page, click the seller's name to see the seller's contact information.

After logging in to your Amazon account, click "My Orders";

If the product is sold directly by Amazon, there is the seller's contact information on the right.

You can also go directly to the shopping page of the product, and see "Seller XXX, Delivery XXX" on the details page, which means that it is sold by a third-party store seller.

Then click on the seller's name to see the seller's contact information in the lower right corner of the page.

After that, everyone can contact the seller and communicate about the product.

Can't connect? Need help?



Email: support@s-tech.com.au

or

Phone: 08 9330 8485

Visit us at: www.s-tech.com.au