




4FT ECOBAT-WP Weatherproof Batten – Microwave Sensor & Emergency

Product Features

- 40w
- 4FT (1200mm)
- 3 colours in one: 4000K, 5000K, 6000K (switch select)
- Built-in Microwave Sensor with 3-step dimming function (on-dim-off)
- Maintained / Non-Maintained Emergency Fitting
- Sensor settings are set using the optional remote control
- Retains last setting by remote control
- 110° Beam Angle
- ABS Base with PC Lens
- IP65 Housing
- IK07 Impact Rating
- Weight: 3.28kg



Options:

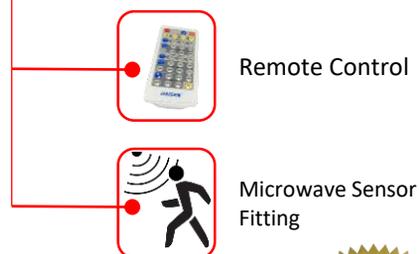

3 Colour Adjustable



Specification Overview



| Model | Power | Power Requirement | Colour Temp | Lumens | Beam Angle | Trim Colour | Dimensions |
|--------------------|-------|-------------------|-----------------|-------------|------------|-------------|---------------|
| ECO-WP-4FT-3C-MR-E | 40w | 200~240VAC | 4000-5000-6000K | 3951~4212lm | 110° | Grey/Opal | 1270x116x74mm |

WP-MS-REMOTE

RF Remote Control for microwave sensor setting

Product Specification




4FT ECOBAT-WP Weatherproof Batten – Microwave Sensor & Emergency




Detection coverage-General

Ceiling Mounted



Wall Mounted



Options:




Remote Control
(Model: WP-MS-REMOTE)

The optional remote control is required to set the parameters for the microwave sensor. Only one remote is required for multiple lights.



Microwave Sensor Fitting
(Model: ECO-WP-4FT-3C-MR)

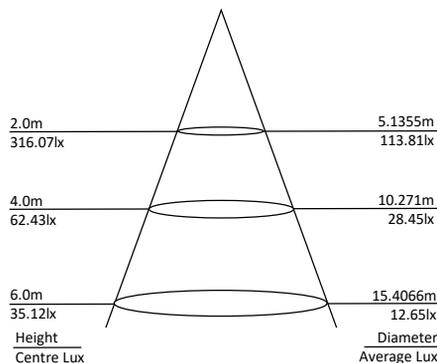

Specification

| | | | |
|---------------------------|---------------------------------|----------|----------|
| Model | ECO-WP-4FT-3C-MR-E | | |
| Colour Temperature (3CCT) | 4000K | 5000K | 6000K |
| Lumen (lm) | 3951lm | 3968lm | 4212lm |
| Efficiency (lm/w) | >105lm/w | >101lm/w | >117lm/w |
| Light Source | LED | | |
| CRI (%) | ≥80 | | |
| Beam Angle | 110° | | |
| Power Requirement | 200~240VAC | | |
| Power Consumption | 37.48w | 39.15w | 36w |
| Emergency Power | 5w | | |
| Emergency Run Time | 90 minutes | | |
| Dimmable | Yes by microwave sensor setting | | |
| Housing | ABS Base with PC Diffuser | | |
| Lifespan | >50,000 hours | | |
| Operation Temperature | -20°C~+50°C | | |
| Product Dimension | 1270 x 116 x 74mm | | |
| Impact Rating | IK07 | | |
| Weight | 1.28kg | | |
| Protection Rating | IP65 | | |
| Warranty | 3 Years | | |

Specifications are subject to change without notice