

Product Specification

Ragbolt / J-bolt
Kit


Model	Watt	Type	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
BOL-W1006-2C	12w	Low Glare	3000K/4000K	630/735lm	120°	Black	Ø100mm x 600mm
BOL-W1006-2C-D	Dali Dimmable Version (special order)						
BOL-W1009-2C	12w	Low Glare	3000K/4000K	630/735lm	120°	Black	Ø100mm x 900mm
BOL-W1009-2C-D	Dali Dimmable Version (special order)						

LED Bollard Light
600mm 12w

Model	Power	Lumens	CCT	Dimension (W x H x D)	Weight
BOL-W1006-2C	12w	630lm/735lm	3000K/4000K	Ø100mm x 600mm	3.1kg

BOL-W1006-2C-D DALI Dimmable Version

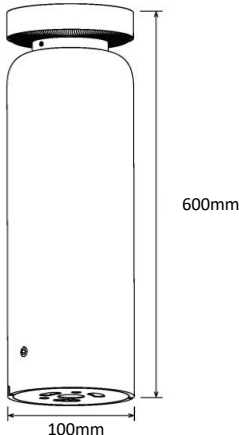

Specification				Dimensions
CCT	3000K/4000K (selectable)	Housing	Aluminium	
Efficacy	>52lm/w	Lens	Polycarbonate	
CRI (%)	≥80	Housing Colour	Black	
Beam Angle	120°	Lifespan	>50,000 hours	
Power Input	220~240VAC	Operation Temperature	-20 °C to +45°C	
Dimmable	No (Optional DALI dimmable version available)			
Impact Rating	IK08			
Protection Rating	IP65	Warranty	3 Years	

Options



Rag Bolt / J-Bolt Kit
Model: BOL-W1006/9-RBK


Use for soft ground installations or for concrete foundations. Includes template.

LED Bollard Light
900mm 12w

Model	Power	Lumens	CCT	Dimension (W x H x D)	Weight
BOL-W1009-2C	12w	630lm/735lm	3000K/4000K	Ø100mm x 900mm	4.3kg

BOL-W1009-2C-D DALI Dimmable Version

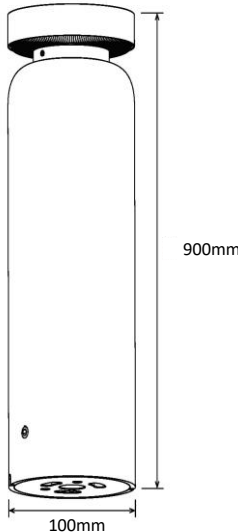

Specification				Dimensions
CCT	3000K/4000K (selectable)	Housing	Aluminium	
Efficacy	>52lm/w	Lens	Polycarbonate	
CRI (%)	≥80	Housing Colour	Black	
Beam Angle	120°	Lifespan	>50,000 hours	
Power Input	220~240VAC	Operation Temperature	-20 °C to +45°C	
Dimmable	No (Optional DALI dimmable version available)			
Impact Rating	IK08			
Protection Rating	IP65	Warranty	3 Years	

Options



Rag Bolt / J-Bolt Kit
Model: BOL-W1006/9-RBK

Use for soft ground installations or for concrete foundations. Includes template.