


Standard remote control WP-MS-REMOTE

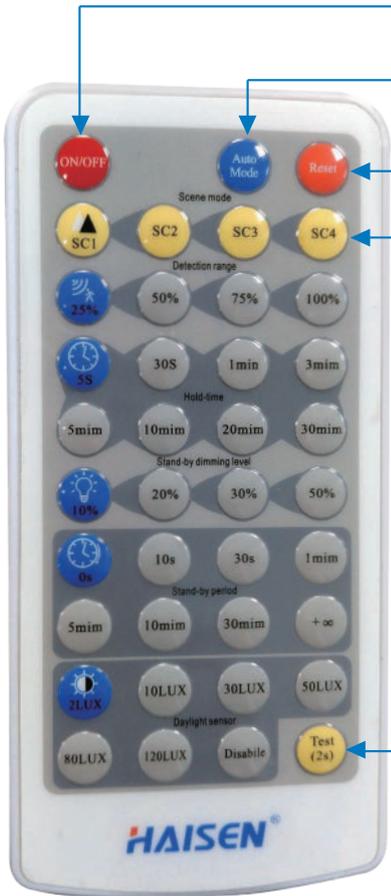

ON/OFF

Press the "ON/OFF" button, the light keeps permanently on or off.
* Press "Auto Mode", "RESET" or "Scene mode" buttons to quit from this mode.

Auto Mode

Press "Auto Mode" button, the sensor starts to work and all settings remain the same before the light gets switched on/off.

Reset

Press "RESET" button, products with DIP switch will be controlled by DIP switches;

▲ Auto Mode

Scene mode	Detection area	Hold-time	Daylight threshold	Stand-by period	Stand-by dimming level
SC1	100%	30s	2Lux	1min	10%
SC2	100%	5min	10Lux	10min	10%
SC3	100%	10min	50Lux	30min	10%
SC4	100%	30min	Disable	+∞	10%

Test (2s)

The button "Test (2s)" is for testing purpose after commissioning. Pressing this button, the sensor goes to test mode (hold time is only 2s) automatically, stand-by period and daylight sensor are disabled. This mode can be ended by pressing "reset", "Auto mode", "scene mode" or "hold time". The sensor setting is changed accordingly. Brightness settings: Disable. Test mode can press any key to exit this mode.



On/off control

There are 4 fixed scene modes program built-in the remote control to choose for different applications.



Detection area

Press the button "detection range" to set detection range as 100% / 75% / 50% / 10%.



Hold-time

Press the button "hold-time" to set hold-time as 5s / 30s / 1min / 3min / 5min / 10min / 20min / 30min .



Daylight threshold

Press the button "daylight sensor" to set daylight threshold as 2Lux / 10Lux / 30Lux / 50Lux / 80Lux / 120Lux / disable.



Stand-by period

Press the button "stand-by period" to set stand-by period as 0s / 10s / 30s / 1min / 5min / 10min / 30min / +∞. Note: "0s" means on/off control; "+∞" means bi-level dimming control.



Stand-by dimming level

Press the button "stand-by dimming level" to set the stand-by dimming level as 10% / 20% / 30% / 50%.

Sensor installation method

The distance between the inductor and the sensor is 4m wide;
Recommended installation of sensor suction ceiling height 3-6m;
Wall mounting height suggested 1-1.8m;
The remote controls the most remote distance 15 meters (in different places remote control distance will have the deviation)
Weight (including battery): 56.5g

