

Product Specification



Canopy Light Series
Large Housing



Product Features

- 100w or 150w or 200w Options
- Colour Temperature: 5000K
- Large range input 180~295VAC
- Easy connect junction box on rear with large terminal block
- 120° Beam Angle
- Aluminium die cast housing
- Opal Polycarbonate Lens
- 580 x 580 x 120mm
- IP65 Housing
- IK10 Impact Rating
- Weight: 11.2kg

Options:



Driver
Extension
Cable



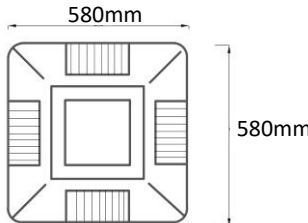
Specification Overview



Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
SCL-100W-VSL	100w	180~295VAC	5000K	10595lm	120°	White	580x580x120mm
SCL-150W-VS	150w	180~295VAC	5000K	14805lm	120°	White	580x580x120mm
SCL-200W-VS	200w	180~295VAC	5000K	18217lm	120°	White	580x580x120mm

Canopy Light Series
100w Large

Model	Trim Colour	Power	Lumens	CCT	Dimension	Weight
SCL-100W-VSL	White	100w	1059lm	5000K	580 x 580 x 120mm	11.2kg

Specification				Dimensions			
CCT	5000K	Housing	Diecast aluminium				
Efficacy	>105lm/w	Diffuser	Polycarbonate				
CRI (%)	≥80	Housing Colour	White				
Beam Angle	120°	Lifespan	>40,000 hours				
Power Input	180~295VAC	Operation Temperature	-20°C~+80°C				
Dimmable	No						
Impact Rating	IK10						
Protection Rating	IP65	Warranty	5 Years				

Options

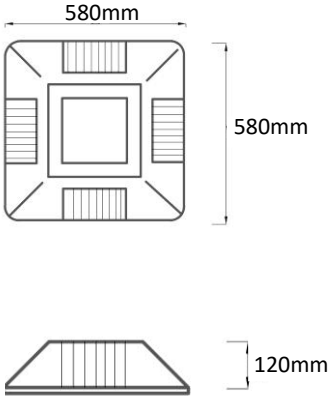


Driver Extension Cable
Model: SCL-EXT-1M

Canopy Light Series

150w Large

Model	Trim Colour	Power	Lumens	CCT	Dimension	Weight
SCL-150W-VS	White	150w	14805lm	5000K	580 x 580 x 120mm	11.2kg

Specification				Dimensions	
CCT	5000K	Housing	Diecast aluminium		
Efficacy	>99lm/w	Diffuser	Polycarbonate		
CRI (%)	≥80	Housing Colour	White		
Beam Angle	120°	Lifespan	>40,000 hours		
Power Input	180~295VAC	Operation Temperature	-20°C~+80°C		
Dimmable	No				
Impact Rating	IK10				
Protection Rating	IP65	Warranty	5 Years		

Options

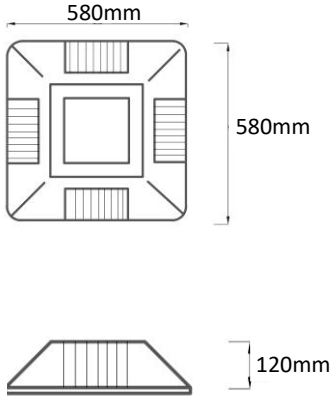


Driver Extension Cable
Model: SCL-EXT-1M

Canopy Light Series

200w Large

Model	Trim Colour	Power	Lumens	CCT	Dimension	Weight
SCL-200W-VS	White	200w	18217lm	5000K	580 x 580 x 120mm	11.2kg

Specification				Dimensions	
CCT	5000K	Housing	Diecast aluminium		
Efficacy	>91lm/w	Diffuser	Polycarbonate		
CRI (%)	≥80	Housing Colour	White		
Beam Angle	120°	Lifespan	>40,000 hours		
Power Input	180~295VAC	Operation Temperature	-20°C~+80°C		
Dimmable	No				
Impact Rating	IK10				
Protection Rating	IP65	Warranty	5 Years		

Options



Driver Extension Cable
Model: SCL-EXT-1M