



PE Photocell Sensor for LED Bunker Light


Product Features

- Dusk-to-Dawn switching
- Installed in the sensor cut-out area of the 20w or 30w bunker (requires minimal re-wiring)
- Multiple lux level settings
- Sensor distinguishes between artificial and natural light



Dip Switch settings (On/Off Value)

	1	2	3	4	open	close
I	ON	ON	ON	ON	5Lux	25Lux
II	ON	ON	ON	-	10Lux	50Lux
III	ON	ON	-	ON	25Lux	75Lux
IV	ON	ON	-	-	50Lux	100Lux
V	ON	-	ON	-	100Lux	200Lux
VI	ON	-	-	-	150Lux	300Lux
VII	-	ON	-	-	200Lux	400Lux
VIII	-	-	-	-	Disable	

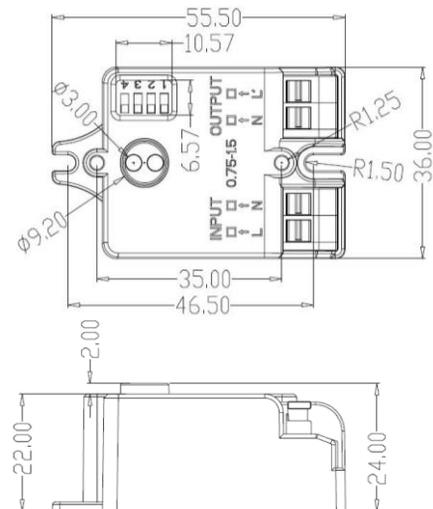

Specification Overview



Model	Standby Power	Power Requirement	Fits Model	Dimensions
WL-BH20-PE	<0.5w	220~240VAC	WL-BH20-3C including emergency versions	55.5 x 36 x 22mm