

Product Specification




Integral Driver Downlight
16w Ø170mm



Product Features

- 16w
- 3 Colour Adjustable (3000K/4000K/5000K)
- 100° Beam Angle
- Ø170 x 66mm
- 140 – 160mm cut-out
- IP54 (front only) Housing
- 0.8m Flex cable and plug included
- Weight: 250g

Specification Overview




Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
RDL-16145-3C-W	16w	220~240VAC	4000K/5000K/6000K	1536~1728lm	100°	White	Ø170 x 66mm

Integral Driver Downlight

16w Ø170mm

Model	Power	Lumens	CCT	Cut-Out	Dimension (Dia x H)	Weight
RDL-16145-3C-W	16w	1536~1728lm	3000K/4000K/5000K	Ø140 – 160mm	Ø170 x 66mm	250g

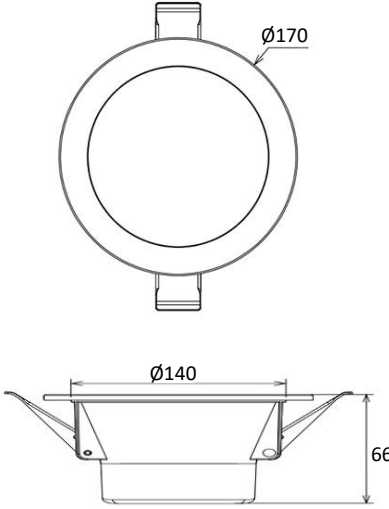Specification				Dimensions
CCT	3000K/4000K/5000K (selectable)	Housing	Plastic Coated Aluminium	
Efficacy	>96lm/w	Lens	Polycarbonate	
CRI (%)	≥80	Housing Colour	White	
Beam Angle	100°	Lifespan	>40,000 hours	
Power Input	220~240VAC	Operation Temperature	-20 °C to +45°C	
Dimmable	Yes, Triac dimmable			
Impact Rating	IK08			
Protection Rating	IP20	Warranty	3 Years	