

Product Specification



Integral Driver Downlight
7w Ø97mm



Product Features

- 7w
- 3 Colour Adjustable (3000K/4000K/5000K)
- 90° Beam Angle
- Ø97 x 54mm
- 70~80mm cut-out
- IP54 (front only)
- 0.6m Flex cable and plug included
- Weight: 200g

Options:




Black Trim



Brushed Chrome Trim

Specification Overview




Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
RDL-0770-3C-W	7W	220~240VAC	3000K/4000K/5000K	560~650lm	90°	White	Ø97 x 54mm

Integral Driver Downlight

7w Ø97mm

Model	Power	Lumens	CCT	Cut-Out	Dimension (Dia x H)	Weight
-------	-------	--------	-----	---------	------------------------	--------

RDL-0770-3C-W	7w	560~650lm	3000K/4000K/5000K	Ø70 – 80mm	Ø97 x 54mm	200g
---------------	----	-----------	-------------------	------------	------------	------

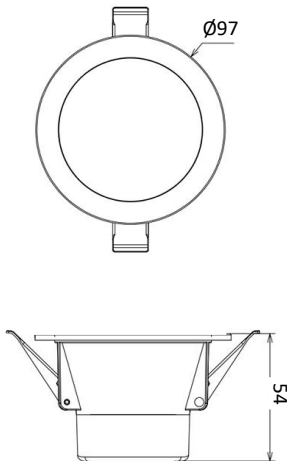Specification				Dimensions	
CCT	3000K/4000K/5000K (selectable via Remote)	Housing	Polycarbonate		
Efficacy	>80lm/w	Lens	Polycarbonate		
CRI (%)	≥80	Housing Colour	White		
Beam Angle	90°	Lifespan	>40,000 hours		
Power Input	220~240VAC	Operation Temperature	-20 °C to +45°C		
Dimmable	Yes, Triac Dimmable				
Impact Rating	IK08				
Protection Rating	IP54 (front), IP20 (rear)	Warranty	3 Years		

Options



Black Trim
RDL-70-TBLK



Brushed Chrome Trim
RDL-70-TBC

Specifications are subject to change without notice