

Product Specification



Adjustable Gimbal Down Light
LED Panel 10w Ø104



Product Features


- 10w
- 3 colour adjustable (3000K, 4000K, 5000K)
- Remote driver with flex and plug
- White, Black or Brushed Chrome Trim options
- 25° tilt
- 100° Beam Angle
- Ø104 x 30mm
- 90mm cut-out
- IP20 Housing
- Weight: 326g



Specification Overview




COLOUR SELECT



Model	Power	Size	Colour Temp	Lumens	Beam Angle	Trim Colour	Power Requirement
PDL-1090AG-3C-W	10w	Ø104 x 30mm	3000K/4000K/5000K	950~1050lm	100°	White	220~240VAC
PDL-1090AG-3C-BC	10w	Ø104 x 30mm	3000K/4000K/5000K	950~1050lm	100°	B/ Chrome	220~240VAC
PDL-1090AG-3C-BLK	10w	Ø104 x 30mm	3000K/4000K/5000K	950~1050lm	100°	Black	220~240VAC

Adjustable Gimbal Down Light
LED Panel 10w Ø104

Model	Trim Colour	Power	Lumens	CCT	Cut-Out	Dimension (Dia x H)	Weight
PDL-1090AG-3C-W	White	10w	950~1050lm	3000K/4000K/5000K	90mm	Ø104 x 30mm	326g
PDL-1090AG-3C-BC	Brushed Chrome	10w	950~1050lm	3000K/4000K/5000K	90mm	Ø104 x 30mm	326g
PDL-1090AG-3C-BLK	Black	10w	950~1050lm	3000K/4000K/5000K	90mm	Ø104 x 30mm	326g

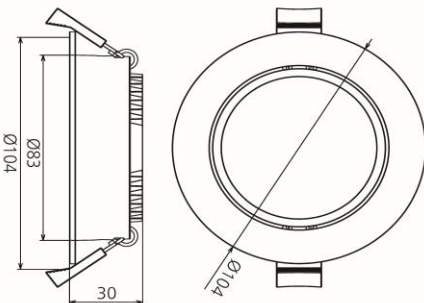Specification				Dimensions	
CCT	3000K/4000K/5000K	Housing	Aluminium		
Efficacy	>95lm/w	Lens	Polycarbonate		
CRI (%)	≥80	Housing Colour	White		
Beam Angle	100°	Lifespan	>50,000 hours		
Power Input	220~240VAC	Operation Temperature	-20 °C to +45°C		
Dimmable	Yes, (with LED, Universal or Trailing Edge Dimmers)				
Impact Rating	IK08				
Protection Rating	IP20	Warranty	5 Years		