

Product Specification



Low Glare Downlight
UGR<19 25w Ø240mm



Product Features

- 25w
- 3 Colour Adjustable (3000K/4000K/5000K)
- Low Glare Design (UGR<19)
- 60° Beam Angle
- Ø240 x 142mm
- 195 – 230mm cut-out
- IP44
- 0.6m Flex cable and plug included
- Weight: 930g

Specification Overview

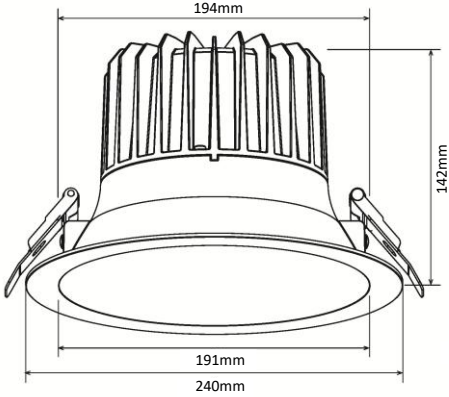


Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
DLU-20200-3C-W	25w	220~240VAC	3000K/4000K/5000K	2100~2700lm	60°	White	Ø240 x 142mm

Low Glare Downlight
UGR<19 25w Ø240mm

Model	Power	Lumens	CCT	Cut-Out	Dimension (Dia x H)	Weight
-------	-------	--------	-----	---------	------------------------	--------

DLU-20200-3C-W	25w	2100~2700lm	3000K/4000K/5000K	Ø195 – 230mm	Ø240 x 142mm	930g
----------------	-----	-------------	-------------------	--------------	--------------	------

Specification				Dimensions	
CCT	3000K/4000K/5000K	Housing	Aluminium		
Efficacy	>84lm/w	Lens	Polycarbonate		
CRI (%)	≥90	Housing Colour	White		
Beam Angle	60°	Lifespan	>40,000 hours		
Power Input	220~240VAC	Operation Temperature	-20 °C to +45°C		
Dimmable	Yes, (with LED, Universal or Trailing Edge Dimmers)	Glare Rating	UGR<19		
Impact Rating	IK08	CRI	>90		
Protection Rating	IP44 front, IP20 rear	Warranty	3 Years		