

Product Specification




Low Glare Down Light
UGR<23 6w Ø85mm



Product Features

- 6w
- 3 colour adjustable (3000K, 4000K, 5000K)
- Low Glare Design
- 60° Beam Angle
- Ø85 x 84mm
- 70mm cut-out
- IP54 (front only) protection
- 0.6m Flex cable and plug included
- Weight: 125g

Specification Overview




Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
DLU-0670-3C-W	6W	220~240V.A.C	3000K/4000K/5000K	500~700lm	60°	White	Ø85 x 84mm

Low Glare Down Light
UGR<23 6w Ø85mm

Model	Power	Lumens	CCT	Cut-Out	Dimension (Dia x H)	Weight
-------	-------	--------	-----	---------	------------------------	--------

DLU-0670-3C-W	6w	500~700lm	3000K/4000K/5000K	70mm	Ø85 x 84mm	125g
---------------	----	-----------	-------------------	------	------------	------

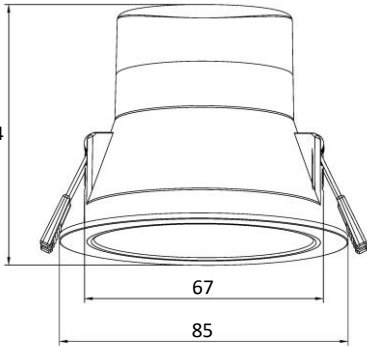Specification				Dimensions
CCT	3000K/4000K/5000K	Housing	Plastic coated aluminium	
Efficacy	>83lm/w	Lens	Polycarbonate	
CRI (%)	≥80	Housing Colour	White	
Beam Angle	60°	Lifespan	>40,000 hours	
Power Input	220~240VAC	Operation Temperature	-20 °C to +45°C	
Dimmable	Yes, (with LED, Universal or Trailing Edge Dimmers)	Glare Rating	UGR<23	
Impact Rating	IK08			
Protection Rating	IP54 (front), IP40 (rear)	Warranty	3 Years	

