

Product Specification



Adjustable Gimbal Down Light
10w Ø100mm



Product Features

- Adjustable Gimbal
- 10w
- 5 Colour Adjustable (2700K, 3000K, 4000K, 5000K, 6500K)
- Low Glare Design
- White Reflector and Trim
- 6x Replacement Trim Colour Options
- 60° Beam Angle
- Ø100 x 66mm
- 90mm cut-out
- IP44 protection (Front)
- 0.8m Flex cable and plug included
- Weight: 260g


Trim Options:



Black



Brushed Chrome



Brushed Copper



Matte Gold




Polished Gold



Polished Chrome

Specification Overview




Model	Power	Size	Colour Temp	Lumens	Beam Angle	Trim Colour	Power Requirement
DLU-1090AG-5C-W	10w	Ø100 x 66mm	2700K/3000K/4000K/5000K/6500K	900~990lm	60°	White	200~240VAC

Adjustable Gimbal Down Light

10w Ø100mm

Model	Power	Lumens	CCT	Cut-Out	Dimension (Dia x H)	Weight
DLU-1090AG-5C-W	10w	900~990lm	2700K/3000K/4000K/5000K/6500K	90mm	Ø100 x 66mm	260g

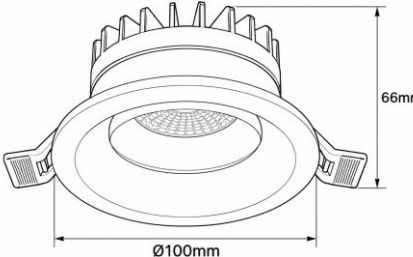Specification				Dimensions	
CCT	2700K/3000K/4000K /5000K/6500K	Housing	Plastic Coated Aluminium		
Efficacy	>90lm/w	Lens/Trim	Polycarbonate		
CRI (%)	≥90	Housing Colour	White Optional Trims		
Beam Angle	60°	Lifespan	>54,000 hours		
Power Input	200~240VAC	Operation Temperature	-20 °C to +45°C		
Dimmable	Yes, (with LED, Universal or Trailing Edge Dimmers)				
Impact Rating	IK08				
Protection Rating	IP44 (Front) IP20 (Rear)	Warranty	3 Years		

Trim Options					
	Black Model: DLU-AG-TBLK		Matte Gold Model: DLU-AG-TMG		
	Brushed Chrome Model: DLU-AG-TBC		Polished Gold Model: DLU-AG-TPG		
	Brushed Copper Model: DLU-AG-TCPR		Polished Chrome Model: DLU-AG-TPC		

Specifications are subject to change without notice