

Product Specification



LED Down Light  
PDL Recessed Trim Series



Product Features


- Remote Driver
- 3 colour adjustable (3000K, 4000K, 5000K)
- Ø190, Ø225 and Ø300mm size options available
- Dimmable
- IP44
- 0.6m Flex cable and plug included

Options:



Adaptor Plates  
(In some models)

Specification Overview




Model	Power	Size	Colour Temp	Lumens	Beam Angle	Trim Colour	Power Requirement
PDL-22165-3C-WHT	22w	Ø108 x 38mm	3000K/4000K/5000K	2000~2200lm	100°	White	220~240VAC
PDL-22190-3C-WHT	22w	Ø228 x 45mm	3000K/4000K/5000K	2000~2200lm	100°	White	220~240VAC
PDL-35260-3C-WHT	35w	Ø280 x 52mm	3000K/4000K/5000K	3150~4680lm	100°	White	220~240VAC

LED Down Light  
22w Ø190

Model	Power	Lumens	CCT	Cut-Out	Dimension (Dia x H)	Weight
-------	-------	--------	-----	---------	------------------------	--------

PDL-22165-3C-WHT	22w	2000~2200lm	3000K/4000K/5000K	160-170mm	Ø190 x 45mm	900g
------------------	-----	-------------	-------------------	-----------	-------------	------

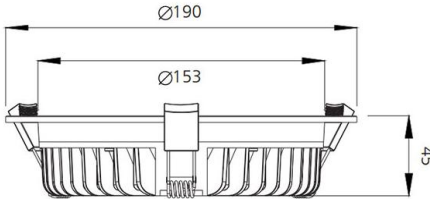
Specification				Dimensions			
CCT	3000K/4000K/5000K	Housing	Aluminium				
Efficacy	>90lm/w	Lens	Polycarbonate				
CRI (%)	≥80	Housing Colour	White				
Beam Angle	100°	Lifespan	>50,000 hours				
Power Input	220~240VAC	Operation Temperature	-20 °C to +45°C				
Dimmable	Yes, (with LED, Universal or Trailing Edge Dimmers)						
Impact Rating	IK08						
Protection Rating	IP44	Warranty	5 Years				

LED Down Light  
22w Ø228

Model	Power	Lumens	CCT	Cut-Out	Dimension (Dia x H)	Weight
-------	-------	--------	-----	---------	------------------------	--------

PDL-22190-3C-WHT	22w	2000~2200lm	3000K/4000K/5000K	200-210mm	Ø228 x 45mm	940g
------------------	-----	-------------	-------------------	-----------	-------------	------

Specification				Dimensions	
CCT	3000K/4000K/5000K	Housing	Aluminium		
Efficacy	>90lm/w	Lens	Polycarbonate		
CRI (%)	≥80	Housing Colour	White		
Beam Angle	100°	Lifespan	>50,000 hours		
Power Input	220~240VAC	Operation Temperature	-20 °C to +45°C		
Dimmable	Yes, (with LED, Universal or Trailing Edge Dimmers)				
Impact Rating	IK08				
Protection Rating	IP44	Warranty	5 Years		

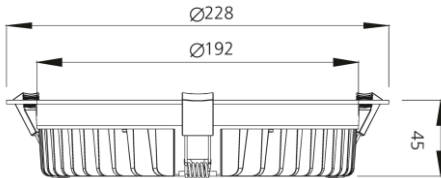

Options




Adaptor Plate  
ID: Ø200mm, OD: Ø300mm  
Model: PDL-TRIM-300/200

LED Down Light  
35w Ø280

Model	Power	Lumens	CCT	Cut-Out	Dimension (Dia x H)	Weight
-------	-------	--------	-----	---------	------------------------	--------

PDL-35260-3C-WHT	35w	3150~4680lm	3000K/4000K/5000K	230-260mm	Ø280 x 52mm	940g
------------------	-----	-------------	-------------------	-----------	-------------	------

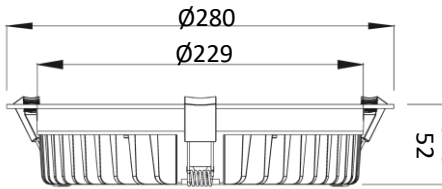Specification				Dimensions	
CCT	3000K/4000K/5000K	Housing	Aluminium		
Efficacy	>90lm/w	Lens	Polycarbonate		
CRI (%)	≥80	Housing Colour	White		
Beam Angle	100°	Lifespan	>50,000 hours		
Power Input	220~240VAC	Operation Temperature	-20 °C to +45°C		
Dimmable	Yes, (with LED, Universal or Trailing Edge Dimmers)				
Impact Rating	IK08				
Protection Rating	IP44	Warranty	5 Years		

Options



Adaptor Plate  
ID: Ø230mm, OD: Ø300mm  
Model: PDL-TRIM-300/230