



EasyLink Connectable Strip Light

Product Features

- Slim profile connectable light strip
- Fast link and shadow free
- 4 length options - 84mm, 260mm, 500mm and 1000mm
- Multiple connection options and controllers
- Maximum run length: 5m
- 3000K/4000K/5000K selectable
- 120° Beam Angle
- Aluminium base with PC Lens
- 16.5mm wide x 12.5mm high
- IP20 Housing



Specification Overview



Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
EL-084-3C	1w	24VDC	3000-4000-5000K	110~120lm	120°	Silver	84x16.5x12.5mm
EL-260-3C	3.5w	24VDC	3000-4000-5000K	385~420lm	120°	Silver	260x16.5x12.5mm
EL-500-3C	6.5w	24VDC	3000-4000-5000K	715~780lm	120°	Silver	500x16.5x12.5mm
EL-1000-3C	13w	24VDC	3000-4000-5000K	1430~1560lm	120°	Silver	1000x16.5x12.5mm
EL-PWR-80W	80w Driver to run up-to 5m of Easylink – supplied with 1.8m DC cable and 1.5m AC flex and plug						

Product Specification



Easylink Connectable Strip Light - Accessories



EL-FX

Input power cable

- 1m long
- Wire to wall switch to turn ON/OFF
- Fixed Colour selection



EL-SW

Input switch cable

- Push switch to turn on and to cycle colours
- Hold switch to dim light (retains dimming setting)



EL-SEN

Input Hand Gesture cable

- Wave hand once for ON/OFF
- Wave hand twice for CCT change
- Hold hand under sensor to dim light (retains dimming setting)



EL-EXT1

Driver Extension Cable

- 1m long



EL-EXT1

Splitter Cable


- 250mm long
- 1 to 4 feeds



EL-CLIP-45

45° Install Clips

- Use when you want to mount the EasyLink strip at a 45° angle



EL-CNR

Rotatable Connector

- Adjustable joiner from 80° to 280°
- Fully illuminated (1w)
- 84mm long



EL-LINK1

Light Link Cable

- 90° Corner for when mounting vertically
- Fully illuminated (1w)
- 42 x 42mm long




EL-LINK1

Light Link Cable

- 1m Long
- Use to extend to another area

Product Specification

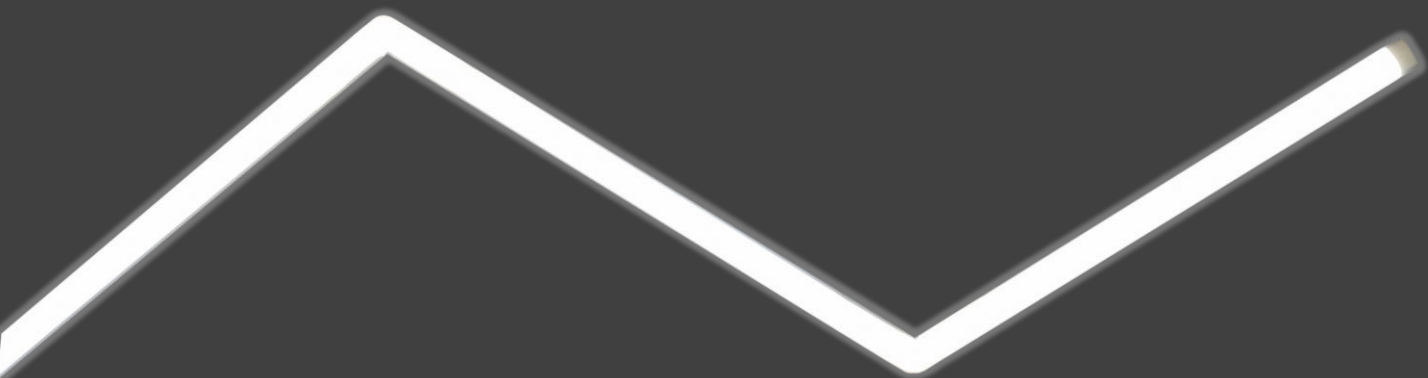


Easylink Connectable Strip Light

Specification


Model	EL-084-3C	EL-260-3C	EL-500-3C	EL-1000-3C
Colour Temperature (3CCT)	3000K / 4000K / 5000K			
Lumen (lm)	110~120lm	385~420lm	715~780lm	1430~1560lm
Efficiency (lm/w)	>110			
Light Source	LED			
CRI (%)	≥80			
Beam Angle	120°			
Power Requirement	24VDC			
Power Consumption	1w	3.5w	6.5w	13w
Housing	Aluminium Base with PC Diffuser			
Lifespan	>50,000 hours			
Operation Temperature	-20°C~+45°C			
Product Dimension (LxWxD)	86 x 16.5 x 12.5mm	260 x 16.5 x 12.5mm	500 x 16.5 x 12.5mm	1000 x 16.5 x 12.5mm
Protection Rating	IP20			
Warranty	3 Years			

Specifications are subject to change without notice

Product Specification

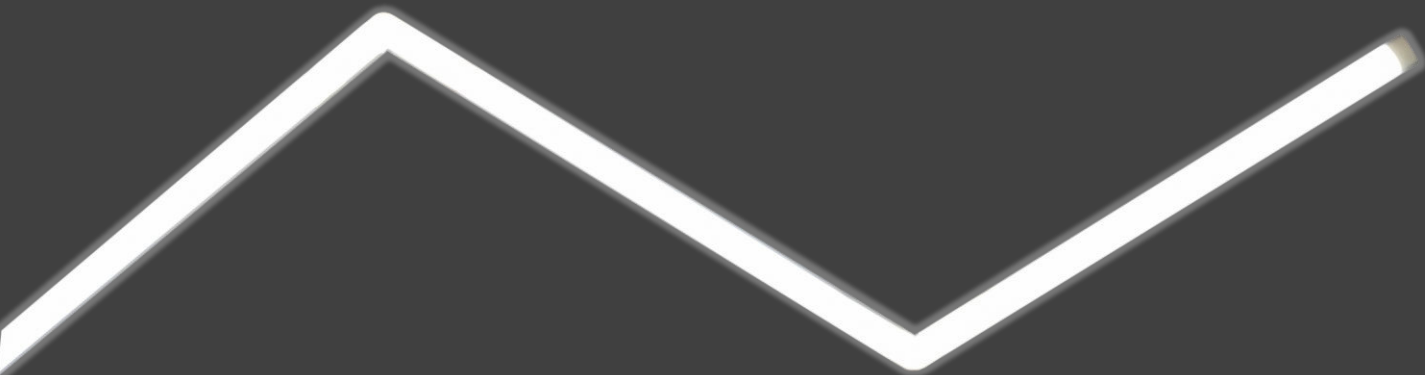

Easylink Connectable Strip Light

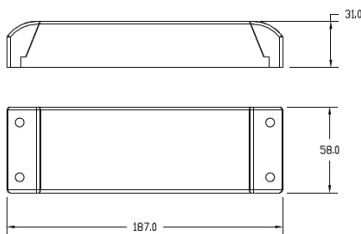

Specification	
Model	EL-PWR-80W
Input Voltage	220-240VAC / 50-60 Hz
Output Voltage	24VDC
Output Current	3300 mA
Output Wattage	80w
Max. Length of Easylink	Drives up-to the maximum 5m of Easylink
Driver Type	Constant Voltage
Cable Length (AC)	1.5m with AU Plug
Cable Length (DC)	1.8m with DC Plug
Housing	Thermoplastic
Lifespan	>50,000 hours
Operation Temperature	-20°C~+45°C
Product Dimension (LxWxD)	187mm x 58mm x 31mm
Protection Rating	IP20
Warranty	1 Year

Specifications are subject to change without notice