

Product Specification



Emergency and Exit
Blade Exit Sign



Product Features

- 4w
- Polycarbonate Housing
- Maintained Emergency Mode
- Complete with all pictograms
- Complies with AS2293.3
- Classification C0:E4.0;C90:D2.0
- 358 x 215 x 60mm
- IP20
- Weight: 1.1kg

Options:



Black Fitting



Recessed Kit



Specification Overview

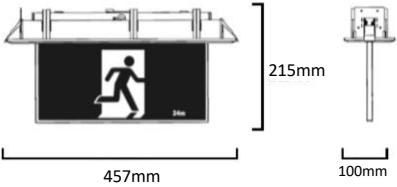


Model	Power	Input	Viewing Distance	Trim Colour	Dimensions
EXIT-SBS	4w	110~240VAC	24m	White	358 x 215 x 60mm
EXIT-SBS-B	4w	110~240VAC	24m	Black	358 x 215 x 60mm
EXIT-RKIT	Recessed Kit, use together with EXIT-SBS to become a recessed fitting			White	457 x 100 x 70mm
EXIT-RKIT-B	Recessed Kit, use together with EXIT-SBS-B to become a recessed fitting			Black	457 x 100 x 70mm

Emergency and Exit

Blade Exit Sign

Model	Power	Classification	Cut-Out (With Recessed Kit)	Trim Colour	Dimension (L x H x D)	Weight
EXIT-SBS-B	4w	C0:E4.0;C90:D2.0	410 x 75mm	Black	358 x 215 x 60mm	1.1kg
EXIT-SBS	4w	C0:E4.0;C90:D2.0	410 x 75mm	White	358 x 215 x 60mm	1.1kg

Specification				Dimensions	
Power Input	110~240VAC	Housing	Body: PC Diffuser: PE Diffuser: PC with light diffuser	<div>Standard</div>  <div>With Recessed Kit</div> 	
Standby Time	> 3 hours	Housing Colour	Black or White		
Charging Time	< 16 hours				
Testing	Manual				
Battery Capacity	LifePO4: 3.2V / 500mAH				
Classification	C0:E4.0;C90:D2.0				
Indicator	Green and Red (Bi-Colour)				
Protection Rating	IP20	Warranty	3 Years (battery 1 year)		

Supplied Pictograms



Options



Recessed Kit – Black

Model: EXIT-RKIT-B



Recessed Kit – White

Model: EXIT-RKIT