

Product Specification



Emergency and Exit
Surface Mount Exit Sign



Product Features

- 4w
- Polycarbonate Housing
- Maintained Emergency Mode
- Complete with all pictograms
- Complies with AS2293.3
- Classification C0:E4.0;C90:D2.0
- 358 x 211 x 62.5mm
- IP20
- Weight: 800g

Options:



Recessed Kit

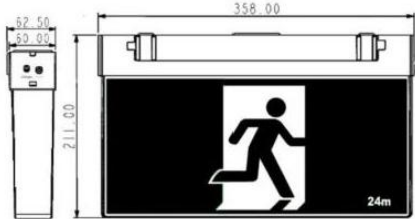
Specification Overview



Model	Power	Input	Viewing Distance	Trim Colour	Dimensions
EXIT-SM	4w	110~240VAC	24m	White	358 x 211 x 62.5mm
EXIT-RKIT	Recessed Kit, use together with EXIT-SM to become a recessed fitting			White	457 x 100 x 70mm

Emergency and Exit
Surface Mount Exit Sign

Model	Power	Classification	Cut-Out (With Recessed Kit)	Dimension (L x H x D)	Weight
EXIT-SM	4w	C0:E4.0;C90:D2.0	410 x 75mm	358 x 211 x 62.5mm	800g

Specification				Dimensions
Power Input	110~240VAC	Housing	Body: PC Diffuser: PE Diffuser: PC (White) with light diffuser	
Standby Time	> 3 hours	Housing Colour	White	
Charging Time	< 16 hours			
Testing	Manual			
Battery Capacity	LifePO4: 3.2V / 500mAH			
Classification	C0:E4.0;C90:D2.0			
Indicator	Green and Red (Bi-Colour)			
Protection Rating	IP20	Warranty	3 Years (battery 1 year)	

Supplied Pictograms



Options



Recessed Kit – White
Model: EXIT-RKIT