



Surface Mount Exit Sign 24m



Product Features

- 4W
- Polycarbonate Housing
- Maintained Emergency Mode
- Complete with all pictograms
- Complies with AS2293.3
- Classification C0:E4.0;C90:D2.0
- 358 x 211 x 62.5mm



Options:



Recessed Kit

Specification Overview




Model	Power	Power Requirement	Viewing Distance	Trim Colour	Dimensions
EXIT-SM	4w	110~240VAC	24m	White	358 x 211 x 62.5mm
EXIT-RKIT	Recessed Kit, use together with EXIT-SM to become a recessed fitting			White	457 x 100 x 70mm

Product Specification



Surface Mount Exit Sign 24m

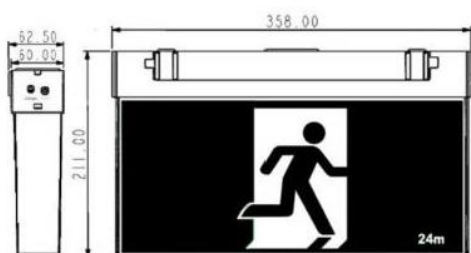


Pictograms:



Specification

Model	EXIT-SM
Light Source	LED
Power Requirement	110~240VAC
Power Consumption	4w
Standby Time	> 3 hours
Charging Time	< 16 hours
Testing	Manual
Indicator	Green and Red (Bi-Colour)
Battery Capacity	LifePO4: 3.2V / 500mAH
Housing	Body: PC Diffuser: PE Diffuser: PC (white) with light diffuser
Mounting	Ceiling, Wall or Recessed (requires kit)
Cable Entry	Ø21mm
Product Dimension	358 x 211 x 62.5mm
Weight	800g
Protection Rating	IP20
Classification	C0:E4.0;C90:D2.0
Warranty	3 Years (Battery 1 year)

Options:



Recessed Kit – White
Model: EXIT-RKIT

Specifications are subject to change without notice