



600w High Power LED Flood Light

Product Features

- 600w
- 5000K
- Full range power input 90~305VAC
- Aluminium die cast housing
- Tempered glass face
- 60° Symmetrical Beam Angle
- 637 x 462 x 134mm
- Rating: IP66
- Weight: 15kg

Options:



Pole Mounted
Head Frames



Mounting Poles





Cut-off Hood




Model	Watt	Size	CCT	Lumens	Beam Angle	Trim Colour	Weight
FL-600-RV	600w	672 x 534 x 188mm	5000K	84,000lm	60°	Black	15kg

600w High Power LED Flood Light

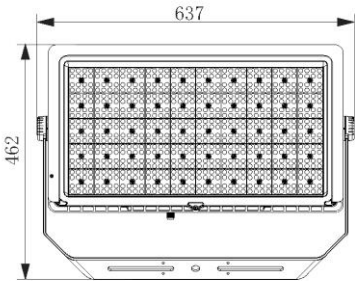

Mounting Holes

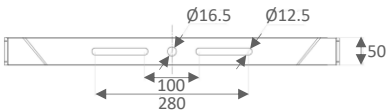

Options:



Pole Mounted Head Frames
Single Model: SL-HF-1
Double Model: SL-HF-2
Triple Model: SL-HF-3
Available in Galvanised or PC options



Mounting Poles
Contact for options
Available in Galvanised or PC options



Cut-off Hood
Model: FLA-SC500-CH

Poles and head frames are available in galvanised or powder coated finishes

Specification	
Model	FL-600-RV
Colour Temperature (1CCT)	5000K
Lumen (lm)	84,000lm
Efficiency (lm/w)	>140lm/w
Light Source	LED
CRI (%)	≥80
Beam Angle	60°
Power Requirement	90~305VAC
Power Consumption	600w
Dimmable	No
Housing	Diecast aluminium with toughened glass lens
Lifespan	>50,000 hours
Operation Temperature	-20°C~+60°C
Product Dimension	637 x 462 x 134mm
Impact Rating	IK08
Weight	15kg
Protection Rating	IP66
Warranty	5 Years

Specifications are subject to change without notice