



High Power LED Flood Light Series

Product Features

- 1000w or 1200w Options
- 5000K
- Twin Light Head Design
- Full range power input 90~305VAC
- Aluminium die cast housing
- Tempered glass face
- 1000w Beam Options: 60° Symmetrical or 150/80° Asymmetrical
- 1200w Beam Option: 30° Symmetrical
- 637 x 1120 x 134mm
- Rating: IP66
- Weight: 33kg (1000w), 34kg (1200w)

Options:



Pole Mounted Head Frames



Mounting Poles




Cut-off Hood




Model	Watt	Size	CCT	Lumens	Beam Angle	Trim Colour	Weight
FLA-SC1000W-RV	1000w	637 x 1120 x 134mm	5000K	140,000lm	60° Symmetrical	Black	33kg
FLA-SC1000W-AV	1000w	637 x 1120 x 134mm	5000K	116,200lm	150/80° Asymmetrical	Black	33kg
FL-1200S-V	1200w	637 x 1120 x 134mm	5000K	168,000lm	30° Symmetrical	Black	34kg

1000w High Power LED Flood Light

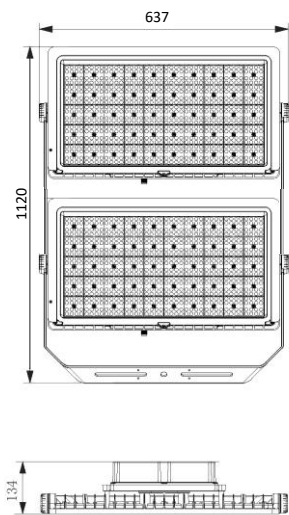

Lens Options:

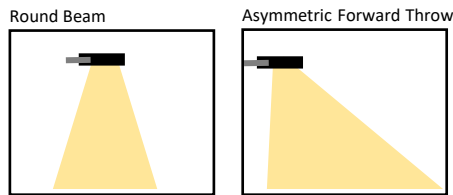

Options:



Pole Mounted Head Frames
Single Model: SL-HF-1
Double Model: SL-HF-2
Triple Model: SL-HF-3
Available in Galvanised or PC options



Mounting Poles
Contact for options
Available in Galvanised or PC options



Cut-off Hood
Model: FLA-SC500-CH


Poles and head frames are available in galvanised or powder coated finishes

Specification		
Model	FLA-SC1000W-RV	FLA-SC1000W-AV
Colour Temperature (1CCT)	5000K	
Lumen (lm)	140,000lm	116,200lm
Efficiency (lm/w)	>140lm/w	>116lm/w
Light Source	LED	
CRI (%)	≥80	
Beam Angle	60°	150/80°
Lens Type	Symmetrical	Asymmetrical
Power Requirement	90~305VAC	
Power Consumption	1000w	
Dimmable	No	
Housing	Diecast aluminium with toughened glass lens	
Lifespan	>50,000 hours	
Operation Temperature	-20°C~+60°C	
Product Dimension	637 x 1120 x 134mm	
Impact Rating	IK08	
Weight	33kg	
Protection Rating	IP66	
Warranty	5 Years	

Specifications are subject to change without notice



1200w High Power LED Flood Light

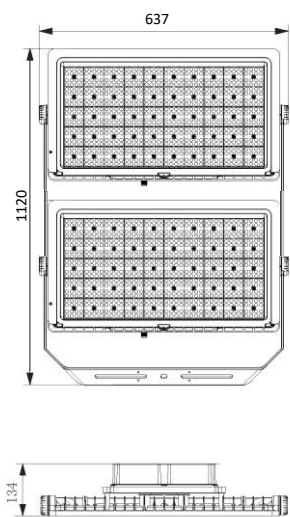

Specification	
Model	FL-1200S-V
Colour Temperature (1CCT)	5000K
Lumen (lm)	168,000lm
Efficiency (lm/w)	>140lm/w
Light Source	LED
CRI (%)	≥80
Beam Angle	30°
Lens Type	Symmetrical
Power Requirement	90~305VAC
Power Consumption	1200w
Dimmable	No
Housing	Diecast aluminium with toughened glass lens
Lifespan	>50,000 hours
Operation Temperature	-20°C~+60°C
Product Dimension	637 x 1120 x 134mm
Impact Rating	IK08
Weight	34kg
Protection Rating	IP66
Warranty	5 Years

Options:



Pole Mounted Head Frames
Single Model: SL-HF-1
Double Model: SL-HF-2
Triple Model: SL-HF-3
Available in Galvanised or PC options



Mounting Poles
Contact for options
Available in Galvanised or PC options



Cut-off Hood
Model: FLA-SC500-CH

Poles and head frames are available in galvanised or powder coated finishes

Specifications are subject to change without notice