



100w WATT & COLOUR SELECT SparX LED Flood Light

Product Features

- 30w-60w-100w (Watt Select)
- 3 colours in one: 3000K/4000K/5000K (selectable)
- Aluminium die cast housing
- Tempered glass face
- 120° Beam Angle
- 250 x 167 x 42mm
- IP65 Housing
- Weight:950g



WATT SELECT



COLOUR SELECT






Specification Overview

Model	Power	Power Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
FL-SPARX	30w/60w/100w	220~240VAC	3000-4000-5000K	2850lm (30w) 5700lm (60w) 9000lm (100w)	120°	Black	250x167x42mm

Product Specification



100w WATT & COLOUR SELECT SparX LED Flood Light

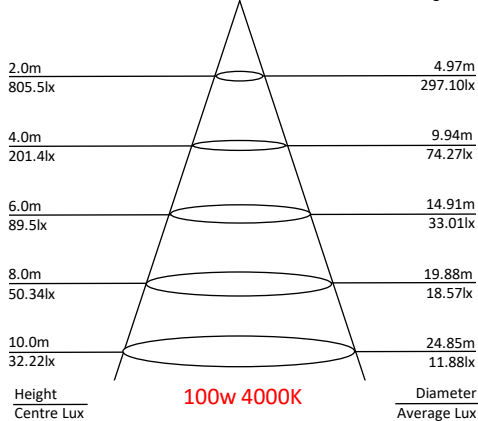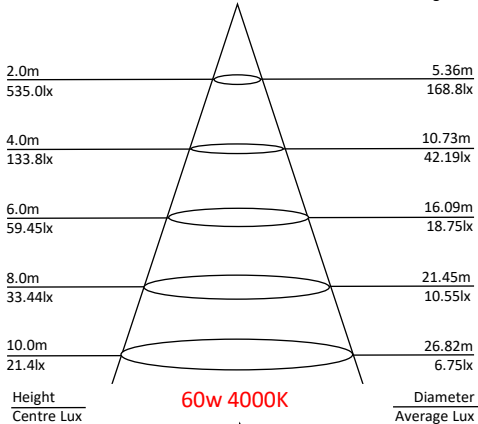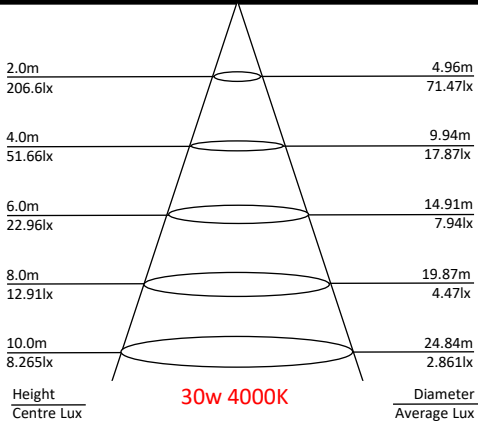

Specification			
Model	FL-SPARX		
Colour Temperature (3CCT)	3000K / 4000K / 5000K		
Lumen (lm) @ 4000K	2850lm	5700lm	9000lm
Efficiency (lm/w)	>95lm/w		
Light Source	LED		
CRI (%)	≥80		
Beam Angle	120°		
Power Requirement	220~240VAC		
Power Consumption (selectable)	30w	60w	100w
Dimmable	No		
Housing	Diecast aluminium with toughened glass lens		
Lifespan	>40,000 hours		
Operation Temperature	-20°C~+45°C		
Product Dimension	250 x 167 x 42mm		
Impact Rating	IK08		
Weight	950g		
Protection Rating	IP65		
Warranty	3 Years		

Specifications are subject to change without notice