



Sparx-XL LED Flood Light


Product Features

- 120w-150w-200w (Watt Select)
- 3 colours in one: 3000K/4000K/5000K (selectable)
- Aluminium die cast housing
- Tempered glass face
- 120° Beam Angle
- 420 x 350 x 55mm
- Rating: IP65
- Weight: 3.7kg



Model	Watt	Size	CCT	Lumens	Beam Angle	Trim Colour	Weight
FL-SPX-XL	120w-150w-200w	420 x 350 x 55mm	3000K/4000K/5000K	13200-22000lm	120°	Black	3.7kg

Sparx-XL LED Flood Light

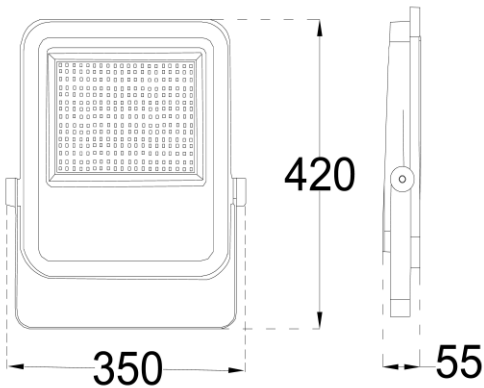

Specification	
Model	FL-SPX-XL
Colour Temperature (3CCT)	3000K / 4000K / 5000K
Lumen (lm)	13200lm ~ 22000lm
Efficiency (lm/w)	>120lm/w
Light Source	LED
CRI (%)	≥80
Beam Angle	120°
Power Requirement	220~240VAC
Power Consumption (selectable)	120w / 150w / 200w
Dimmable	No
Housing	Diecast aluminium with toughened glass lens
Lifespan	>40,000 hours
Operation Temperature	-20°C~+45°C
Product Dimension	420 x 350 x 55mm
Impact Rating	IK08
Weight	3.7kg
Protection Rating	IP65
Warranty	3 Years

Specifications are subject to change without notice