



100w V24 Slimline LED Flood Light

Product Features

- 100w
- 5000K
- Full range power input 90~305VAC
- Aluminium die cast housing
- Tempered glass face
- 120° Symmetrical Beam Angle
- 309 x 312 x 53mm
- Rating: IP66
- Weight: 2.72kg

Options:



Pole Mounted  
Head Frames




Mounting Poles




Model	Watt	Size	CCT	Lumens	Beam Angle	Trim Colour	Weight
FL-100S-V	100w	309 x 312 x 53mm	5000K	15,939lm	120°	Black	2.72kg

100w V24 Slimline LED Flood Light

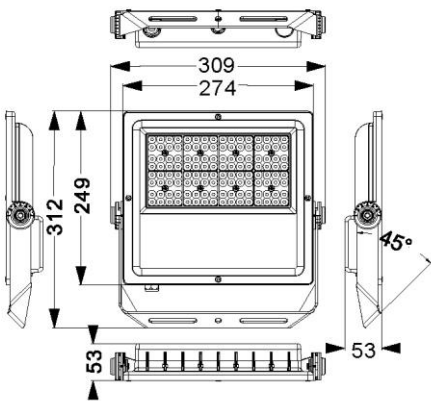

Mounting Holes

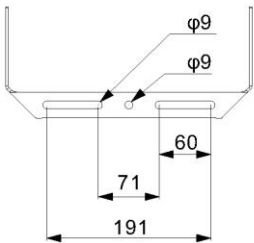

Options:



Pole Mounted Head Frames  
Single Model: SL-HF-1  
Double Model: SL-HF-2  
Triple Model: SL-HF-3  
Available in Galvanised or PC options



Mounting Poles  
Contact for options  
Available in Galvanised or PC options

Poles and head frames are available in galvanised or powder coated finishes

Specification	
Model	FL-100S-V
Colour Temperature (1CCT)	5000K
Lumen (lm)	15,939lm
Efficiency (lm/w)	>166lm/w
Light Source	LED
CRI (%)	≥80
Beam Angle	120°
Power Requirement	90~305VAC
Power Consumption	96w
Dimmable	No
Housing	Diecast aluminium with toughened glass lens
Lifespan	>50,000 hours
Operation Temperature	-20°C~+60°C
Product Dimension	309 x 312 x 53mm
Impact Rating	IK08
Weight	2.72kg
Protection Rating	IP66
Warranty	5 Years

Specifications are subject to change without notice