



200w V24 Slimline LED Flood Light

Product Features

- 200w
- 4000K or 5000K options
- Full range power input 90~305VAC
- Aluminium die cast housing
- Tempered glass face
- 120° Symmetrical Beam Angle
- 309 x 413 x 53mm
- Rating: IP66
- Weight: 3.76kg

Options:



Pole Mounted
Head Frames




Mounting Poles




Model	Watt	Size	CCT	Lumens	Beam Angle	Trim Colour	Weight
FL-200S-V	200w	309 x 413 x 53mm	5000K	30,896lm	120°	Black	3.76kg
FL-200S-T	200w	309 x 413 x 53mm	4000K	30,376lm	120°	Black	3.76kg

200w V24 Slimline LED Flood Light

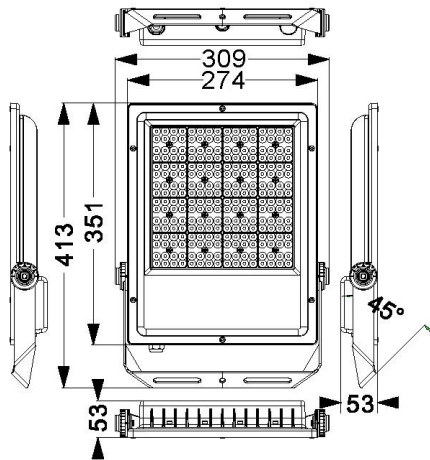

Mounting Holes



Options:



Pole Mounted Head Frames
Single Model: SL-HF-1
Double Model: SL-HF-2
Triple Model: SL-HF-3
Available in Galvanised or PC options



Mounting Poles
Contact for options
Available in Galvanised or PC options

Poles and head frames are available in galvanised or powder coated finishes

Specification		
Model	FL-200S-V	FL-200S-T
Colour Temperature (1CCT)	5000K	4000K
Lumen (lm)	30,896lm	30,376lm
Efficiency (lm/w)	>167lm/w	>164lm/w
Light Source	LED	
CRI (%)	≥80	
Beam Angle	120°	
Power Requirement	90~305VAC	
Power Consumption	184.10w	
Dimmable	No	
Housing	Diecast aluminium with toughened glass lens	
Lifespan	>50,000 hours	
Operation Temperature	-20°C~+60°C	
Product Dimension	309 x 413 x 53mm	
Impact Rating	IK08	
Weight	3.76kg	
Protection Rating	IP66	
Warranty	5 Years	

Specifications are subject to change without notice