



400w V24 Slimline LED Flood Light

Product Features

- 400w
- 4000K or 5000K
- Full range power input 90~305VAC
- Aluminium die cast housing
- Tempered glass face
- 90° Symmetrical Beam Angle or 130/60° Asymmetrical Beam option (5000K only)
- 515 x 443 x 62mm
- Rating: IP66
- Weight: 7.42kg

Options:



Pole Mounted Head Frames



Mounting Poles




Model	Watt	Size	CCT	Lumens	Beam Angle	Trim Colour	Weight
FL-400S-V	400w	515 x 443 x 62mm	5000K	60,680lm	90° Symmetrical	Black	7.42kg
FL-400S-T	400w	515 x 443 x 62mm	4000K	59,770lm	90° Symmetrical	Black	7.42kg
FL-400A-V	400w	515 x 443 x 62mm	5000K	51,864lm	130/60° Asymmetrical	Black	7.42kg



400w V24 Slimline LED Flood Light


Specification

Model	FL-400S-V	FL-400S-T	FL-400A-V
Colour Temperature (1CCT)	5000K	4000K	5000K
Lumen (lm)	60,680lm	59,770lm	51,864lm
Efficiency (lm/w)	>157lm/w	>155lm/w	>177lm/w
Light Source	LED		
CRI (%)	≥80		
Beam Angle	90°		130/60°
Lens Type	Symmetrical		Asymmetrical
Power Requirement	90~305VAC		
Power Consumption	385.10w		378.10w
Dimmable	No		
Housing	Diecast aluminium with toughened glass lens		
Lifespan	>50,000 hours		
Operation Temperature	-20°C~+60°C		
Product Dimension	515 x 443 x 62mm		
Impact Rating	IK08		
Weight	7.42kg		
Protection Rating	IP66		
Warranty	5 Years		




400w V24 Slimline LED Flood Light

Drawing:

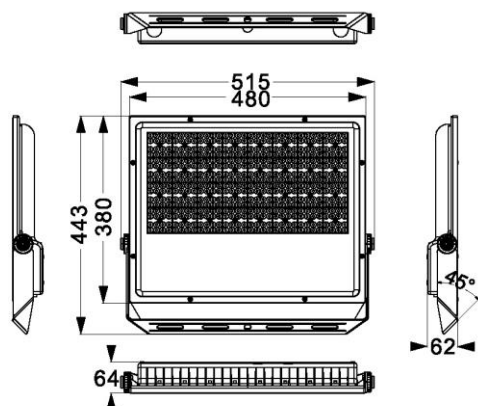


Mounting Holes

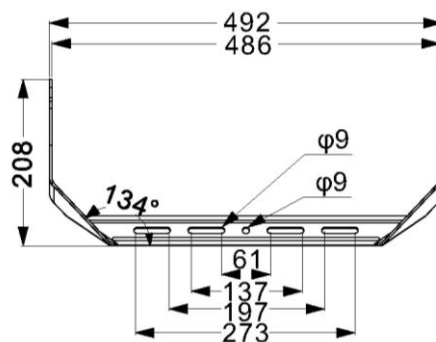


Lens Options:

Symmetrical Beam



Asymmetrical Forward Throw



Options:



Pole Mounted Head Frames

Single Model: SL-HF-1

Double Model: SL-HF-2

Triple Model: SL-HF-3

Available in Galvanised or PC options



Mounting Poles

Contact for options

Available in Galvanised or PC options

Poles and head frames are available in galvanised or powder coated finishes