




## High Mast LED Flood Light (Medium Housing)

### Product Features

- Available in 300w or 400w
- Quality Meanwell Driver
- 10kV Surge Protector
- Aluminium die cast housing
- Tempered glass face
- Forward throw lens (asymmetric) providing low glare and minimal light spill to meet Australian Standards
- Corrosion resistant polyester powder coat finish
- IP65 Housing

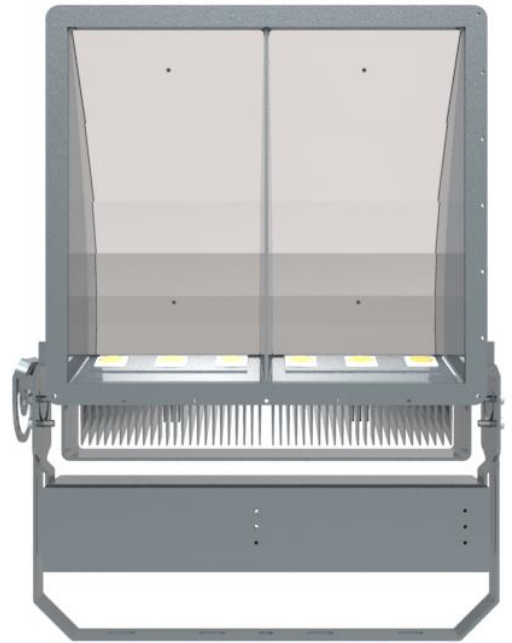



### Specification Overview

Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
ST-M-HML300N-V	300w	100~277VAC	5000K	39416lm	Forward throw narrow	Black	466 x 682 x 152mm
ST-M-HML400N-V	400w	100~277VAC	5000K	52063lm	Forward throw narrow	Black	466 x 682 x 152mm

# Product Specification



## High Mast LED Flood Light (Medium Housing)

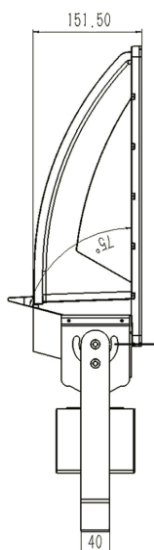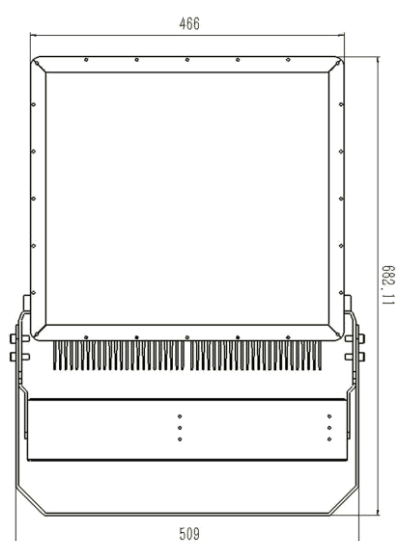

### Specification

Model	ST-M-HML300N-V	ST-M-HML400N-V
Colour Temperature (1CCT)	5000K (others optional)	
Lumen (lm)	39416lm	52063lm
Efficiency (lm/w)	>130lm/w	
Light Source	Nichia LED	
CRI (%)	≥80	
Beam Angle	Asymmetric (Forward Throw) Narrow	
Power Requirement	100~277VAC (180~528V optional)	
Power Consumption	300w	400w
Dimmable	Optional (0-10V or Dali)	
Housing	Diecast aluminium with toughened glass lens	
Lifespan	>50,000 hours	
Operation Temperature	-40°C~+70°C	
Product Dimension	466 x 682 x 152mm	
Impact Rating	IK08	
Weight	17.5kg	
Protection Rating	IP65	
Warranty	7 Years	

Specifications are subject to change without notice