



100w LED Flood Light with Polycarbonate Lens

Product Features

- 100w
- Quality Driver
- Full range power input 90~305VAC
- Aluminium die cast housing
- Polycarbonate Face
- 90° Beam Angle
- 366 x 330 x 70mm
- IP66, IK10 Housing
- Weight: 4.0kg



Vandal Resistance
IK10



Specification Overview



Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
FL-100W-PCT	100w	90~305VAC	4000K	13,279lm	90°	Black	366x330x70mm


Product Specification



100w LED Flood Light with Polycarbonate Lens

Specification

Model	FL-100W-PCT
Colour Temperature (1CCT)	4000K
Lumen (lm)	13279lm
Efficiency (lm/w)	>141lm/w
Light Source	LED
CRI (%)	≥80
Beam Angle	90°
Power Requirement	90~305VAC
Power Consumption	93.7w
Dimmable	No
Housing	Diecast aluminium with polycarbonate lens
Lifespan	>50,000 hours
Operation Temperature	-20°C~+60°C
Product Dimension	366x 330 x 70mm
Impact Rating	IK10
Weight	4.0kg
Protection Rating	IP66
Warranty	5 Years

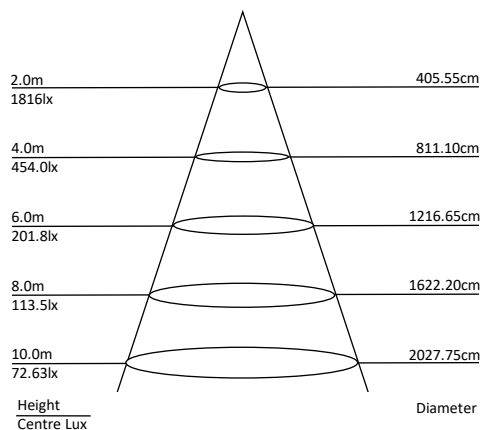

Specifications are subject to change without notice