



150w LED Flood Light with Polycarbonate Lens

Product Features

- 150w
- Quality Driver
- Full range power input 90~305VAC
- Aluminium die cast housing
- Polycarbonate Face
- 90° Beam Angle
- 366 x 408 x 70mm
- IP66, IK10 Housing
- Weight: 5.2kg



Vandal Resistance
IK10



Specification Overview




Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
FL-150W-PCT	150w	90~305VAC	4000K	19,992lm	90°	Black	366x408x70mm

Product Specification



150w LED Flood Light with Polycarbonate Lens

Specification	
Model	FL-150W-PCT
Colour Temperature (1CCT)	4000K
Lumen (lm)	19,992lm
Efficiency (lm/w)	>140lm/w
Light Source	LED
CRI (%)	≥80
Beam Angle	90°
Power Requirement	90~305VAC
Power Consumption	140.6w
Dimmable	No
Housing	Diecast aluminium with polycarbonate lens
Lifespan	>50,000 hours
Operation Temperature	-20°C~+60°C
Product Dimension	366 x 408 x 70mm
Impact Rating	IK10
Weight	5.2kg
Protection Rating	IP66
Warranty	5 Years

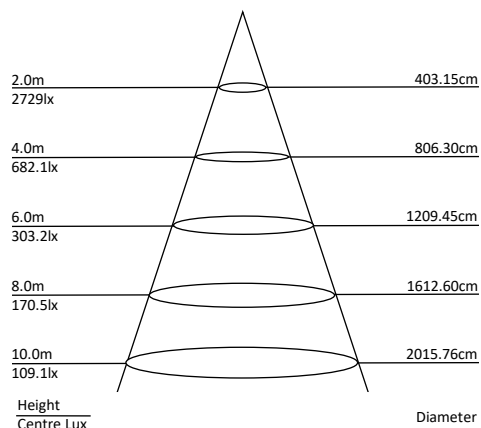

Specifications are subject to change without notice