



300w 19E Series Slimline LED Flood Light

Product Features

- 300w
- Quality Driver
- Full range power input 90~305VAC
- Aluminium die cast housing
- Tempered glass face
- 90° Beam Angle or Asymmetric option
- 503 x 545 x 64mm
- IP66 Housing
- Weight: 9.6kg



Specification Overview




Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
FLA-SC300W-V19E	300w	90~305VAC	5000K	39,454lm	90°	Black	503x545x64mm
FLA-SC300W-AV	300w	90~305VAC	5000K	40,949lm	Asymmetric	Black	503x545x64mm

Product Specification




300w 19E Series Slimline LED Flood Light

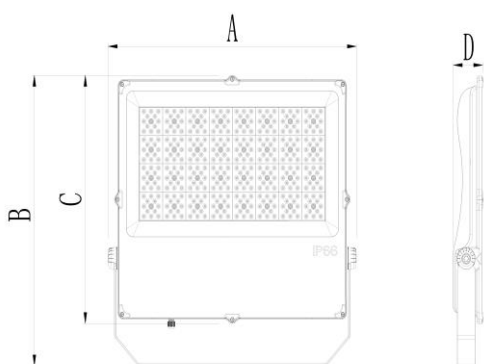


Lens Options:


Round Beam



Asymmetric Forward Throw



90° Round Beam

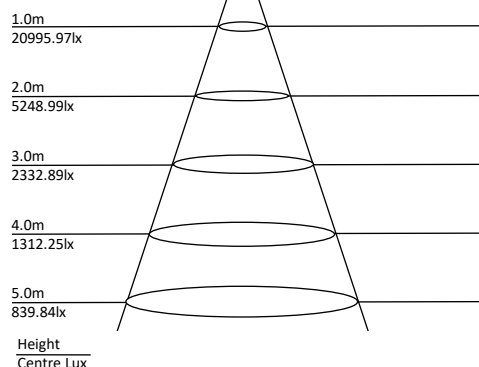

Specification

Model	FLA-SC300W-V19E	FLA-SC300W-AV
Colour Temperature (1CCT)	5000K	
Lumen (lm)	39,454lm	40,949lm
Efficiency (lm/w)	>132lm/w	>137lm/w
Light Source	LED	
CRI (%)	≥80	
Beam Angle	90°	Asymmetric
Power Requirement	90~305VAC	
Power Consumption	298.1w	
Dimmable	No	
Housing	Diecast aluminium with toughened glass lens	
Lifespan	>50,000 hours	
Operation Temperature	-20°C~+60°C	
Product Dimension	503 x 545 x 64mm	
Impact Rating	IK08	
Weight	9.6kg	
Protection Rating	IP66	
Warranty	5 Years	

Specifications are subject to change without notice