



400w 19E Series Slimline LED Flood Light

Product Features

- 400w
- Available in 4000K or 5000K
- Quality Driver
- Full range power input 90~305VAC
- Aluminium die cast housing
- Tempered glass face
- 90° Beam Angle or Asymmetric option
- 503 x 545 x 64mm
- IP66 Housing
- Weight: 10.1kg



Specification Overview



Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
FLA-SC400W-T19E	400w	90~305VAC	4000K	51,143lm	90°	Black	503x545x64mm
FLA-SC400W-V19E	400w	90~305VAC	5000K	52,724lm	90°	Black	503x545x64mm
FLA-SC400W-AV	400w	90~305VAC	5000K	51,959lm	Asymmetric	Black	503x545x64mm

Product Specification



400w 19E Series Slimline LED Flood Light

Specification


Model	FLA-SC400W-T19E	FLA-SC400W-V19E	FLA-SC400W-AV
Colour Temperature	4000K	5000K	5000K
Lumen (lm)	51,143lm	52,724lm	51,959lm
Efficiency (lm/w)	>132lm/w	>132lm/w	>130lm/w
Light Source	LED		
CRI (%)	≥80		
Beam Angle	90°	90°	Asymmetric (forward throw)
Power Requirement	90~305VAC		
Power Consumption	396.8w		
Dimmable	No		
Housing	Diecast aluminium with toughened glass lens		
Lifespan	>50,000 hours		
Operation Temperature	-20°C~+60°C		
Product Dimension	503 x 545 x 64mm		
Impact Rating	IK08		
Weight	10.1kg		
Protection Rating	IP66		
Warranty	5 Years		

Specifications are subject to change without notice

Product Specification




400w 19E Series Slimline LED Flood Light



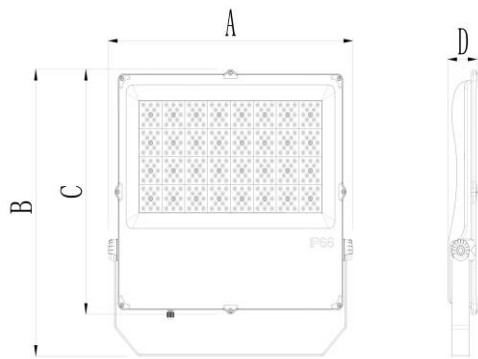


Lens Options:


Round Beam



Asymmetric Forward Throw



90° Round Beam

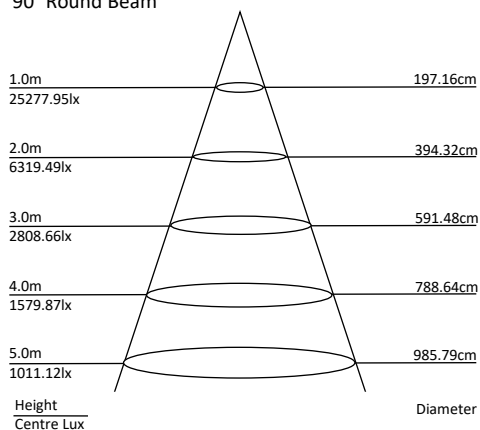

Asymmetric Beam

