

Product Specification



LED High Bay
200w STELLARO UFO



Product Features

- 200w, 150w or 100w Options
- 5000K
- Aluminium die cast housing
- Polycarbonate Lens
- 120° Beam Angle
- Supplied with 1.8m flex and plug
- Optional plug and play motion sensor
- Ø280 x 146mm
- IP65 Housing
- IK08 Impact Rating
- Weight: 2.4kg

Options:



Specification Overview




Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Weight
HB-STELLARO-V	100/150/200w	Ø280x146mm	5000K	16,538~29,898lm	120°	Black	2.4kg

LED High Bay
200w STELLARO UFO



Model	Trim Colour	Power	Lumens	CCT	Dimension (Dia x H)	Weight
HB-STELLARO-V	Black	99.5w	16,538lm	5000K	Ø280 x 146mm	2.4kg
		147.1w	23,692lm			
		197.4w	29,898lm			

Specification				Dimensions
CCT	5000K	Housing	Diecast aluminium	
Efficacy	>151lm/w	Lens	Polycarbonate	
CRI (%)	≥80	Housing Colour	Black	
Beam Angle	120°	Lifespan	>50,000 hours	
Power Input	120~277VAC	Operation Temperature	-40°C to +50°C	
Dimmable	Yes, 0-10V Standard. DALI Dimmable optional with the purchase of the Dali to 0-10V Converter			
Impact Rating	IK08			
Protection Rating	IP65	Warranty	5 Years	

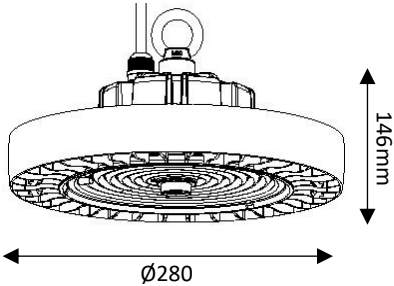

Options			
	Plug-In Motion Sensor (plug and play) Model (Microwave): HB-MMS-ANT54T Model: (PIR): HB-MMS-ANT64T		
			
	Remote Control for set-up of HB-MMS-ANT54T / HB-MMS-ANT64T Model: HB-RC100		
		DALI to 0-10V Converter Make the High Bay DALI Dimmable Model: HB-SCD010B	

Specifications are subject to change without notice