

Product Specification



LED High Bay
200w UFO



Product Features

- 200w, 150w or 100w Options
- 3 colour adjustable (3000K, 4000K, 5000K)
- Quality 0-10V Dimmable Driver
- DALI compatible (with optional converter)
- Full range power input 100~305VAC
- Aluminium die cast housing
- Polycarbonate Lens
- 120° Beam Angle
- Supplied with 1.8m flex and plug
- Ø320 x 210mm
- IP65 Housing
- IK08 Impact Rating
- Weight: 4.6kg

Options:

DALI to 0-10V converter

Anti-Glare Lens

Microwave motion sensor

Bracket for floodlight or low bay fitting

Specification Overview

WATT SELECT
LED HIGHBAY LIGHT

COLOUR SELECT
3K 4K 5K




Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Weight
HB-WS200-V-3C	100/150/200w	Ø320x210mm	3000K/4000K/5000K	16,007~32,268lm	120°	Black	4.6kg

LED High Bay
200w UFO

Model	Trim Colour	Power	Lumens	CCT	Dimension (Dia x H)	Weight
HB-WS200-V-3C	Black	100w	30,172lm	3000K	Ø320 x 210mm	4.6kg
HB-WS200-V-3C	Black	150w	32,268lm	4000K	Ø320 x 210mm	4.6kg
HB-WS200-V-3C	Black	200w	31,585lm	5000K	Ø320 x 210mm	4.6kg

Specification				Dimensions	
CCT	3000K, 4000K or 5000K	Housing	Diecast aluminium with Polycarbonate lens cover		
Efficacy	>150lm/w	Lens	Polycarbonate		
CRI (%)	≥80	Housing Colour	Black		
Beam Angle	120°	Lifespan	>50,000 hours		
Power Input	100~305VAC	Operation Temperature	-40 °C to +50°C		
Dimmable	Yes, 0-10V. DALI with optional converter				
Impact Rating	IK08				
Protection Rating	IP65	Warranty	5 Years		

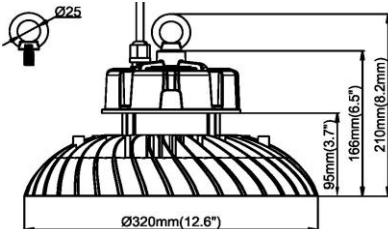

Watt & Colour Select Settings

A B C

CW NW WW

A = 200w

B = 150w

C = 100w

CW = 5000K

NW = 4000K

WW = 3000K

Default: 200w / 5000K

Options			
	Merrytek Microwave Motion Sensor Kit Model: FLA-SHV18S-1-MMSR (Requires remote for setup: FLA-MMS-REMOTE)		Anti-Glare Milky White Lens Model: HB-WS3C-LMW
	Bracket for Floodlight or Low Bay fitting Model: FLA-SHV18S-1-FB		DALI to 0-10V Converter Model: HB-SCD010B

Specifications are subject to change without notice