



# 200w WATT & COLOUR SELECT UFO LED High Bay Light

## Product Features

- 200w-150w-100w (Watt Select)
- 3 colours in one: 3000K/4000K/5000K (selectable)
- Quality 0-10V Dimmable Driver
- DALI compatible (with optional converter)
- Full range power input 100~305VAC
- Aluminium die cast housing
- Polycarbonate Lens
- 120° Beam Angle
- Supplied with 1.8m flex and plug
- Ø320 x 210mm
- IP65 Housing
- Weight: 4.6kg



WATT SELECT  
LED HIGH BAY LIGHT

COLOUR SELECT

Options:

DALI to 0-10V  
converter



Microwave  
motion sensor

Anti-Glare Lens



Bracket for floodlight  
or low bay fitting



## Specification Overview




| Model         | Power        | Power Requirement | Colour Temp       | Lumens          | Beam Angle | Dimensions |
|---------------|--------------|-------------------|-------------------|-----------------|------------|------------|
| HB-WS200-V-3C | 100-150-200w | 100~305VAC        | 3000K/4000K/5000K | 16,007~32,268lm | 120°       | Ø320x210mm |

# Product Specification



## 200w WATT & COLOUR SELECT UFO LED High Bay Light

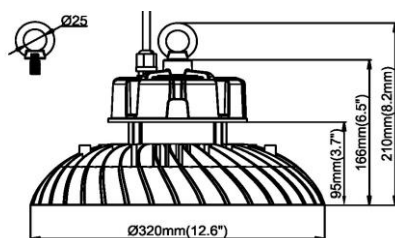

### Accessory options


 Merrytek Microwave Motion Sensor Kit  
Model: FLA-SHV18S-1-MMSR  
(Requires remote for setup: FLA-MMS-REMOTE)

 Bracket for floodlight or low bay fitting  
Model: FLA-SHV18S-1-FB

 Anti-Glare Milky White Lens  
Model: HB-WS3C-LMW

 DALI to 0-10V Converter  
Model: HB-SCD010B

### Watt & Colour Select Settings



A = 200w

B = 150w

C = 100w

CW = 5000K

NW = 4000K

WW = 3000K

**Default: 200w / 5000K**

### Specification

|                                 |                                                 |          |          |
|---------------------------------|-------------------------------------------------|----------|----------|
| Model                           | HB-WS200-V-3C                                   |          |          |
| Colour Temperature (selectable) | 3000K                                           | 4000K    | 5000K    |
| Lumen (lm) @ 200w               | 30172lm                                         | 32268lm  | 31585lm  |
| Efficiency (lm/w)               | ≥150lm/w                                        | ≥161lm/w | ≥157lm/w |
| Light Source                    | LED                                             |          |          |
| CRI (%)                         | ≥80                                             |          |          |
| Beam Angle                      | 120°                                            |          |          |
| Power Requirement               | 100~305VAC                                      |          |          |
| Power Options (selectable)      | 100w                                            | 150w     | 200w     |
| Dimmable                        | Yes, 0-10V. DALI with optional converter        |          |          |
| Housing                         | Diecast aluminium with Polycarbonate lens cover |          |          |
| Lifespan                        | >50,000 hours                                   |          |          |
| Operation Temperature           | -40°C~+50°C                                     |          |          |
| Product Dimension               | Ø320 x 210mm                                    |          |          |
| Impact Rating                   | IK08                                            |          |          |
| Weight                          | 4.6kg                                           |          |          |
| Protection Rating               | IP65                                            |          |          |
| Warranty                        | 5 Years                                         |          |          |

Specifications are subject to change without notice

# Product Specification




## 200w WATT & COLOUR SELECT UFO LED High Bay Light


Photometric Data

100w


5000K



4000K




3000K

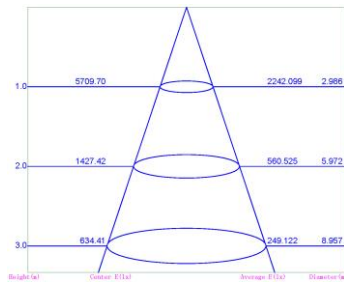


150w


5000K

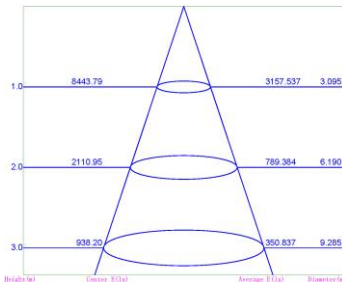

4000K

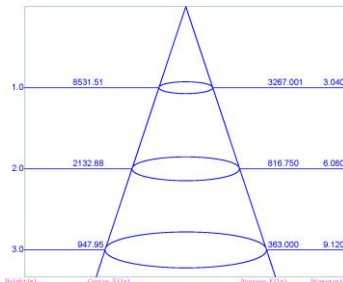


3000K

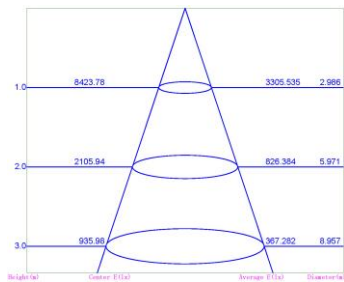


200w

5000K

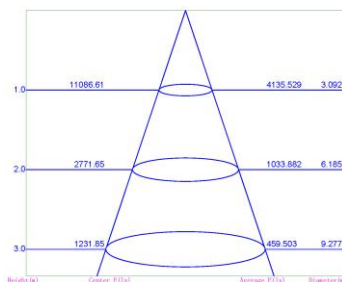

4000K

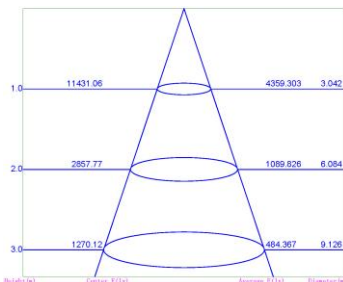

3000K

