



Product Features

- 4m or 6m options available
- Direct Bury – No rag bolt required
- Ø60mm or 76mm Vertical Spigot Options
- Hot Dip Galvanised
- Powder Coated Finish Available
- Suitable for Wind Region A or B only

Options:



Streetlight
Outreaches



Floodlight
Headframes



Adaptors

Specification Overview



Model	Install Type	Pole Height (above ground)	Total Length	Finish	Vertical Spigot Size
FX-PI-4.0DB-XXYY	Direct Bury	4.0m	5.1m	Galvanised or Powder Coated	Ø60mm x 100mm or Ø76mm x 100mm
FX-PI-6.0DB-XXYY	Direct Bury	6.0m	7.6m		

Model Number: XX = 60 or 76 for vertical spigot size, ZZ = leave Blank for Galvanised or -PC for powder coated finish

Mounting Poles

Octagonal – Direct Bury

Model	Install Type	Pole Height (above ground)	Total Length	Vertical Spigot Size	Finish	Weight
FX-PI-4.0DB-60	Direct Bury	4.0m	5.1m	Ø60 x 100mm	Galvanised	35kg
FX-PI-4.0DB-60-PC	Direct Bury	4.0m	5.1m	Ø60 x 100mm	Powder Coated	35kg
FX-PI-4.0DB-76	Direct Bury	4.0m	5.1m	Ø76 x 100mm	Galvanised	35kg
FX-PI-4.0DB-76-PC	Direct Bury	4.0m	5.1m	Ø76 x 100mm	Powder Coated	35kg

Specification

Material

Steel


Finish

Galvanised
(Powder Coating Optional)


Warranty


2 Years

Dimensions

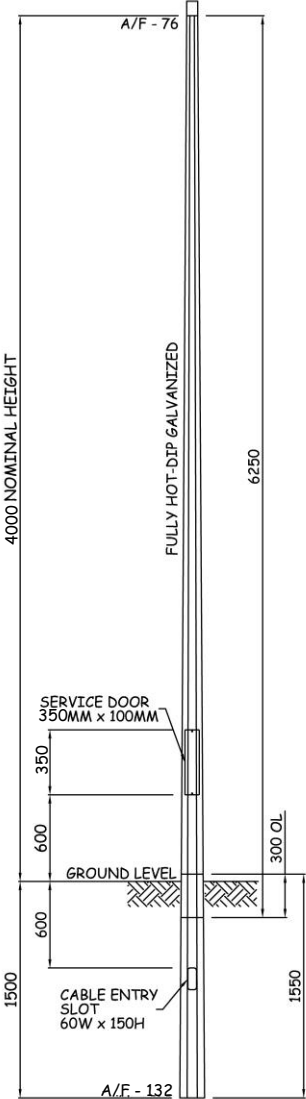


VERTICAL SPIGOT OPTIONS


-60
Ø60mm x 100mm

-76
Ø76mm x 100mm

SECTION A-A



SERVICE DOOR DETAIL



Specifications are subject to change without notice



www.s-tech.com.au

Ver. 1.0, 2025

Mounting Poles

Octagonal – Direct Bury

Model	Install Type	Pole Height (above ground)	Total Length	Vertical Spigot Size	Finish	Weight
FX-PI-6.0DB-60	Direct Bury	6.0m	7.6m	Ø60 x 100mm	Galvanised	55kg
FX-PI-6.0DB-60-PC	Direct Bury	6.0m	7.6m	Ø60 x 100mm	Powder Coated	55kg
FX-PI-6.0DB-76	Direct Bury	6.0m	7.6m	Ø76 x 100mm	Galvanised	55kg
FX-PI-6.0DB-76-PC	Direct Bury	6.0m	7.6m	Ø76 x 100mm	Powder Coated	55kg

Specification

Material

Steel


Finish

Galvanised
(Powder Coating Optional)


Warranty


2 Years

Dimensions

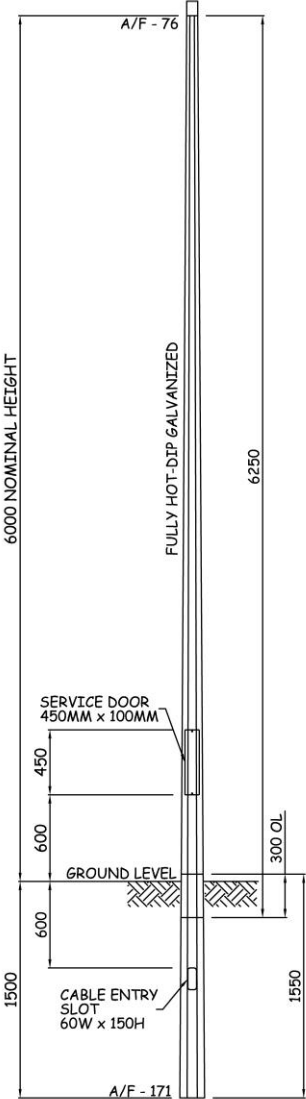


VERTICAL SPIGOT OPTIONS


-60
Ø60mm x 100mm

-76
Ø76mm x 100mm

SECTION A-A



SERVICE DOOR
DETAIL



Specifications are subject to change without notice



www.s-tech.com.au

Ver. 1.0, 2025

Mounting Poles Octagonal – Direct Bury

Switch to Excellence

Options



Single Outreach

Model: SL-SSA60-300-G (galvanised)

Model: SL-SSA60-300-PC (powder coated)

All outreach models suit a 76mm vertical spigot



Floodlight Head Frames

Model: SL-HF-1F (single flood galvanised)

Model: SL-HF-1F-PC (single flood p/coated)

Model: SL-HF-2F (twin flood galvanised)

Model: SL-HF-2F-PC (twin flood p/coated)

Model: SL-HF-3F (triple flood galvanised)

Model: SL-HF-3F-PC (triple flood p/coated)

All head frame models suit a 76mm vertical spigot



Double Outreach

Model: SL-DSA60-300-G (galvanised)

Model: SL-DSA60-300-PC (powder coated)

All outreach models suit a 76mm vertical spigot



Adaptors

Model: SLM-PTA-8060 (76>60mm Black)

Model: SLM-PTA-8060-G (76>60mm Grey)

Model: SLM-PTA-8060-S (76>60mm Silver)

Other adaptors are available to suit other pole and spigot sizes, refer to the adaptor specification sheet for all options