



Options:



Adaptor

Product Features

- Suitable for approved products only
(refer to complete list on following page)
- 5m High
- Direct Bury – No rag bolt required
- Ø89mm x 4mm CHS
- Galvanised
- Suitable for Wind Region A or B only

Specification Overview



Model	Install Type	Pole Height (above ground)	Total Length	Finish	Vertical Spigot Size
-------	--------------	-------------------------------	-----------------	--------	----------------------

FX-PI-6.5DB-89

Direct Bury

5.0m

6.5m

Galvanised

Ø89mm

Mounting Poles

Round Ø89mm – Direct Bury


Model	Install Type	Pole Height (above ground)	Total Length	Vertical Spigot Size	Finish	Weight
-------	--------------	----------------------------	--------------	----------------------	--------	--------

FX-PI-6.5DB-89	Direct Bury	5.0m	6.5m	Ø89mm	Galvanised	18kg
----------------	-------------	------	------	-------	------------	------

Specification	Dimensions
---------------	------------

Material	Steel
Finish	Galvanised
Warranty	2 Years

Approved Products	
SSL-AIO-5	5,100lm All in One Solar Streetlight (Requires SLM-PTA-10160 Adaptor)
SSL-AIO-8	8,160lm All in One Solar Streetlight (Requires SLM-PTA-10160 Adaptor)
SSL-AIO-10	10,200lm All in One Solar Streetlight (Requires SLM-PTA-10160 Adaptor)
SSL-G330C2	4,500lm Split Panel G3 Solar Streetlight (Requires SLM-PTA-10160 Adaptor)
SSL-G415S	1,800lm Single Head Solar Street Light (Requires SSL-G4-S89 Adaptor)
SSL-G415T	3,600lm Twin Head Solar Street Light (Requires SSL-G4-S89 Adaptor)
SPL-3000	3,000lm Solar Pathway Light (Requires SLM-PTA-10160 Adaptor)

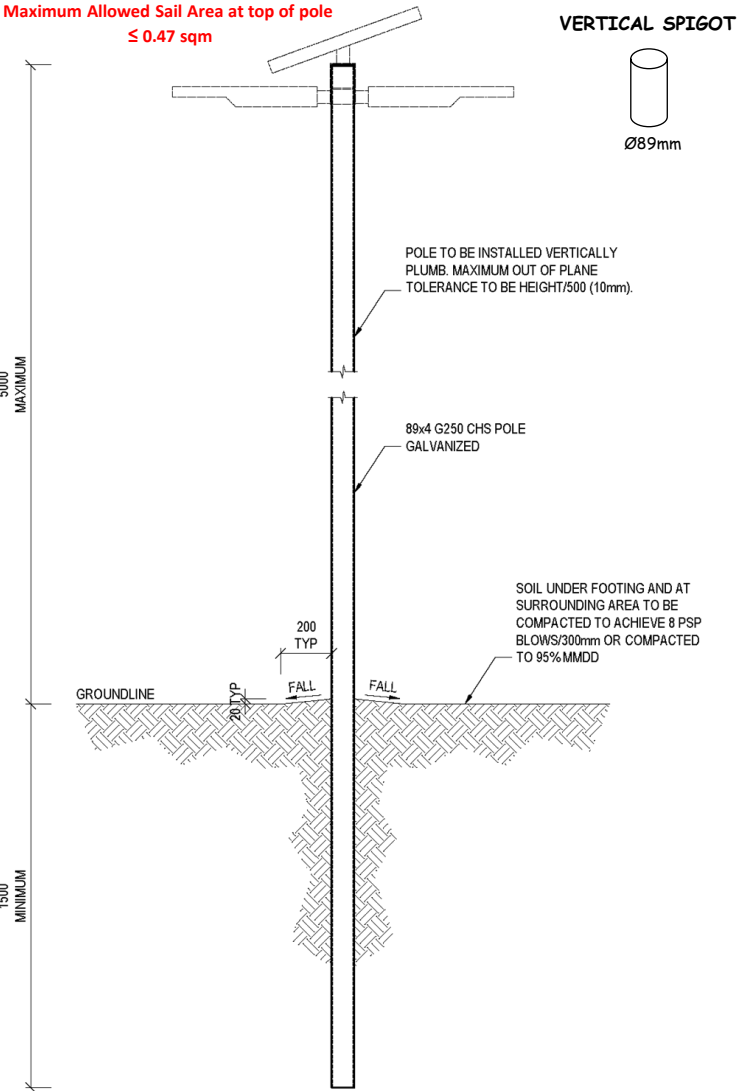

Mounting Poles

Round Ø89mm – Direct Bury

Options



Adaptor 89mm>60mm

Model: SLM-PTA-10160 (galvanised)

Model: SLM-PTA-10160-PC (powder coated)



Adaptor – G4 Solar Panel Spigot

Model: SSL-G4-S89