



110w Portable Lighting Tower

Product Features

- 110w (AC operation), 50w (Battery Powered)
- Twin Light Head Function, adjustable (up/down/left/right)
- Only 6kg (without batteries)
- Dual Rainproof USB ports for charging devices
- Simple deployment
- Maximum light height: 2.3m
- Dimmable under AC operation (0~110w)
- 4 x Brightness Settings under battery operation (5w, 20w, 30w, 50w)
- Accepts 1 only Rechargeable Battery (supplied with kit)
- Runtime:
 - ~4hrs at full brightness (50w)
 - ~44hrs at lowest brightness (5w)
- 995 x 200 x 240mm
- Weight: 6kg



Specification Overview

Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Housing Colour	Dimensions
PLT-110	110w	1 battery or 100~277VAC	5700K	Battery: 500lm~5,000lm AC: 0lm ~ 11,000lm	30°	Blue/Orange	995x200x240mm
PLT-BP	100Ah Lithium Battery Pack *Note: 1pc supplied with PTL-110 Starter Kit						
PLT-BC1	Single Bay Battery Charger *Note: 1pcs supplied with PTL-110 Starter Kit						
PLT-BC2	Dual Bay Battery Charger						
PLT-AC	AC Dimmable Power Supply						



Product Specification



110w Portable Lighting Tower - Accessories

Starter Pack Includes:

- 1 x PLT-110 Portable Light Tower
- 1 x PLT-BC1 Single Bay Rapid Charger
- 1 x PLT-BP D24-100 Battery Pack



PLT-AC AC Driver
Dimmable AC Driver to suit



PLT-BC1 Single Bay Charger
Charge 1 battery



PLT-BC2 Dual Bay Charger
Charge 2 batteries at once



PLT-BP D24-100 Lithium-Ion Battery
The PLT-110 accepts 1 battery pack




PLT-BC9 9 Bay Rapid Charger
Travel case rapid charger supports 2-9 batteries

Product Specification



110w Portable Lighting Tower

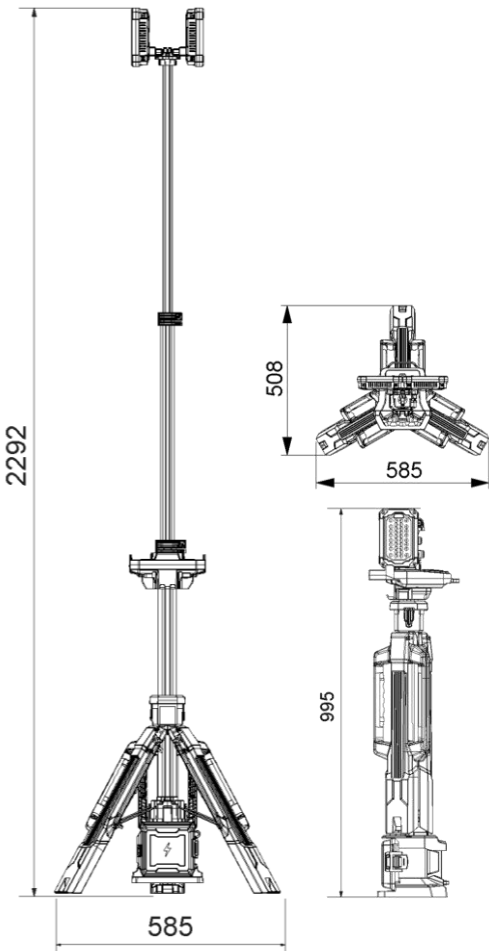


Specification	
Model	PLT-110
Housing Colour	Blue/Orange
Colour Temperature (1CCT)	5700K
Lumen (lm) – Battery Operation	Battery Saver Mode (5w): 500lm Low (20w): 1800lm Med (30w): 3000lm High (50w): 5000lm
Lumen (lm) – AC Operation	0~11000lm (Adjustable)
Light Source	LED
Beam Angle	30°
Power Requirement	Battery: 1 AC Power: 100~240VAC (requires PTL-AC)
Power Consumption (Max)	110w
Dimmable	Yes
Housing	Polycarbonate
Run-Time (battery powered)	Battery Saver: ~44 hours Low: ~16.5 hours Medium: ~8.5 hours High: ~4 hours
Product Dimension (995 x 200 x 240mm
Weight	6kg (no batteries or accessories)
Protection Rating	IP65
Warranty	1 Year

Specifications are subject to change without notice

Product Specification



110w Portable Lighting Tower

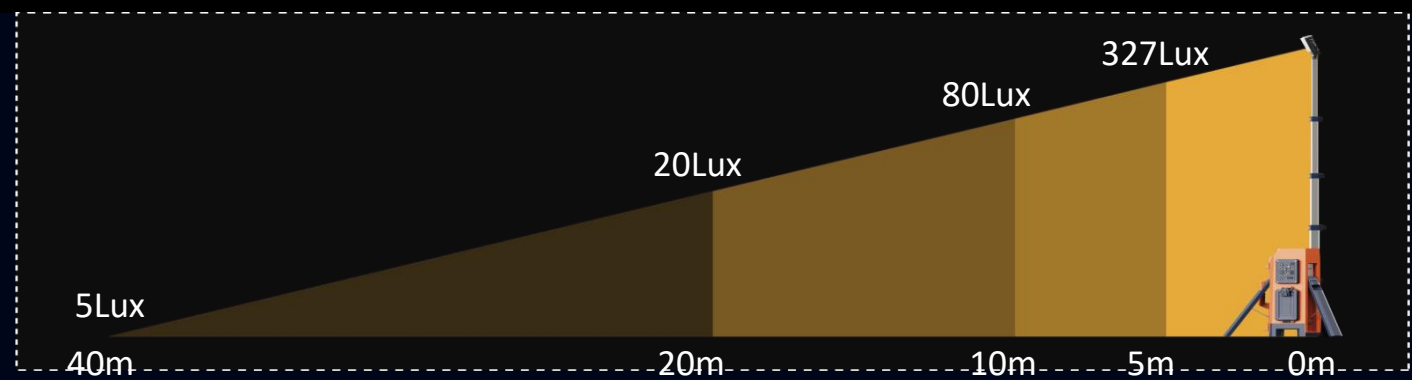







USB Output

Dual rainproof USB outputs for charging two devices at once, rain or shine.



Phone Stand

Continue working while charging, the hook here can serve as a phone stand.



Stepless Dimming

Plug the driver into the rainproof port to unlock maximum brightness and stepless dimming.



Transportation, deployment & lighting adjustment; all you need is one operator and few seconds.