



## 60w Solar RGB Flood Light



### Product Features

- RGB and White (3000~6000K)
- Automatic night-time operation
- Remote control allows brightness and lighting time settings
- Separate solar panel with 5m lead
- Match together with the RGB Solar Bollard to synchronise colours
- 120° Beam Angle
- IP65 Housing
- Weight: 5.5kg




### Specification Overview

Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
SFL-RGB60	60w	Solar	RGB + 3000~6000K	5000lm	120°	Black	Light: 375 x 275 x 52mm Panel: 600 x 370 x 18mm

# Product Specification



## 60w Solar RGB Flood Light

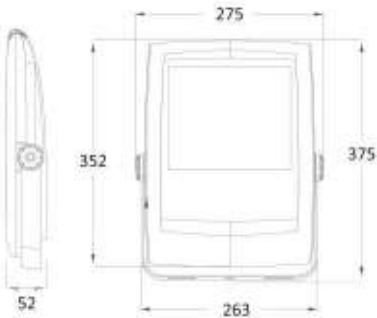

Specification	
Model	SFL-RGB60
Colour Temperature	RGB + 3000~6000K (selectable)
Lumen (lm)	5000lm
Efficiency (lm/w)	>100lm/w
Light Source	LED
CRI (%)	≥80
Beam Angle	120°
Power Requirement	Solar Powered
Battery	LifePO4, 6.4V 18AH
Charging Time	~8 Hours (from 0-100%)
Operation Time	Dusk to dawn
Housing	Aluminium
Remote Control	2.4G (up-to 25m)
Sensor	No
Lifespan	>40,000 hours
Operation Temperature	-10°C~+40°C
Product Dimension (light)	375 x 275 x 52mm
Product Dimension (solar panel)	600 x 370 x 18mm
Weight	5.5kg
Protection Rating	IP65
Warranty	2 Years

\* S-Tech solar products are designed for dusk to dawn operation with added allowance for winter conditions, however you must be aware that in winter months it is possible that some nights the light will not last all night due to inclement weather conditions limiting charging time. Solar is not recommended for any locations classed as critical lighting areas where lighting is required all night.

Specifications are subject to change without notice