

Product Specification



LED Street Lantern 30w Halo



Product Features

- 30w
- 4000K or 5000K Options Available
- Fits 60mm or 76mm spigot size (adaptor included)
- Aluminium die cast housing
- High transmittance, impact resistant polycarbonate lens
- 100° Beam Angle
- Ø520 x 317mm
- IP65 Housing
- IK08 Impact Rating
- Weight: 6kg



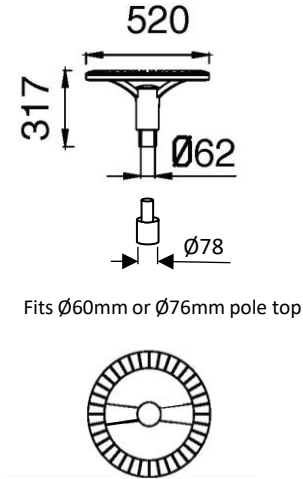
Specification Overview



Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions	Spigot Size
PPL-52030-2-TR	30w	100~240VAC	4000K	2,230lm	120°	Black	Ø520x317mm	60mm or 76mm
PPL-52030-2-VR	30w	100~240VAC	5000K	2,460lm	120°	Black	Ø520x317mm	60mm or 76mm

LED Street Lantern
30w Halo

Model	Power	Lumens	CCT	Spigot Size	Dimension	Weight
PPL-52030-2-TR	30w	2,230lm	4000K	Ø60 or Ø76mm pole top	Ø520 x 317mm	6kg
PPL-52030-2-VR	30w	2,460lm	5000K	Ø60 or Ø76mm pole top	Ø520 x 317mm	6kg

Specification				Dimensions	
CCT	4000K or 5000K	Housing	Diecast aluminium		
Efficacy	>82lm/w	Lens	Polycarbonate		
CRI (%)	≥80	Housing Colour	Black		
Beam Angle	100°	Lifespan	>40,000 hours		
Power Input	100~240VAC	Operation Temperature	-20 °C to +45°C		
Dimmable	No				
Impact Rating	IK08			Fits Ø60mm or Ø76mm pole top	
Protection Rating	IP65	Warranty	5 Years		