

Product Specification



MultiFit V3 LED Street Light
30w 12~24V DC Input



Product Features

- 30w
- 3 Colour Adjustable (3000K/4000K/5000K)
- Black Housing
- Fits 50~60mm spigot size
- 12~24VDC Input Power
- Aluminium die cast housing
- Supports pole top (90° ±15°) or spigot mounting (0° ±15°)
- 150/80° Beam Angle
- IP65 Housing
- IK08 Impact Rating
- Weight: 4.8kg


Options:




Ø36-40mm Spigot Replacement
(black only)




Mounting Poles



Outreach or Spigot Adaptors



Pole top mounting

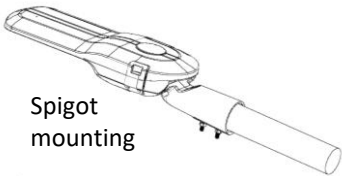

Spigot mounting



Specification Overview


Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions	Spigot Size
SLM-030W-DC	30w	12~24VDC	3000K/ 4000K/ 5000K	4100lm 4298lm 4198lm	150/80°	Black	568x200x109mm	50~60mm



MultiFiT V3 LED Street Light

30w 12~24V DC Input

Model	Power	Lumens (30w)	CCT	Spigot Size	Dimension	Weight
SLM-030W-DC	30w/60w	4100 lm	3000K	Ø50~Ø60mm	568 x 200 x 109mm (spigot mount)	4.8kg
		4298 lm	4000K			
		4198 lm	5000K			

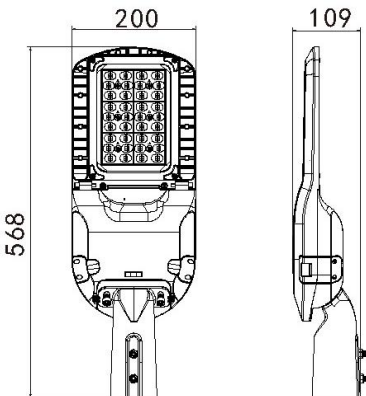Specification				Dimensions	
CCT	3000K/4000K/5000K (selectable)	Housing	Aluminium		
Efficacy	>136lm/w	Lens	Toughened Glass		
CRI (%)	≥80	Housing Colour	Black		
Beam Angle	150°/80°	Lifespan	>40,000 hours		
Power Input	12~24VDC	Operation Temperature	-30 °C to +40°C		
Dimmable	No	NEMA Socket	N/A		
Impact Rating	IK08				
Protection Rating	IP65	Warranty	5 Years		

Options					
	SLM-SPIGOT-40 Ø36-40mm Spigot Replacement		Mounting Poles Direct Bury and Base Plate options available		SL-WP60-200-G Wall Plate – HDG Finish
	SL-SSA60-300-G Single 60mm OD 300mm Outreach – fits 76mm spigot – HDG finish SL-SSA60-300-PC Powder coated version		SLM-PTA-8060 Pole Top Adaptor Ø76~80mm > 60mm Black Finish SLM-PTA-8060-G (grey) SLM-PTA-8060-S (silver)		
	SL-DSA60-300-G Double 60mm OD 300mm Outreach – fits 76mm spigot – HDG finish SL-DSA60-300-PC Powder coated version		SLM-SA-3460-B Spigot Adaptor Ø32-34mm > 60mm Black Finish SLM-SA-3460-S (silver)		

Specifications are subject to change without notice