



## 55w LED Urban Park Lantern

### Product Features

- 55w
- Fits 76mm spigot size
- Aluminium die cast housing, aluminium lid and Steel Spigot and Arm for strength
- Toughened glass face
- 110° Beam Angle
- Ø650 x 450mm
- IP65 Housing
- IK08 Impact Rating
- Weight: 10kg




### Specification Overview

| Model        | Power | Power Requirement | Colour Temp | Lumens | Beam Angle | Trim Colour | Dimensions | Spigot Size |
|--------------|-------|-------------------|-------------|--------|------------|-------------|------------|-------------|
| PSL-65055-TR | 55w   | 100~277VAC        | 4000K       | 4406lm | 110°       | Black       | Ø650x450mm | 76mm        |

# Product Specification



## 55w LED Urban Park Lantern

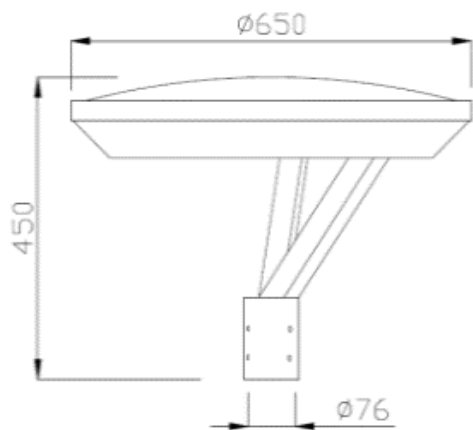

### Specification

|                           |                                                                               |
|---------------------------|-------------------------------------------------------------------------------|
| Model                     | PSL-65055-TR                                                                  |
| Colour Temperature (1CCT) | 4000K                                                                         |
| Lumen (lm)                | 4406lm                                                                        |
| Efficiency (lm/w)         | >80lm/w                                                                       |
| Light Source              | LED                                                                           |
| CRI (%)                   | ≥80                                                                           |
| Beam Angle                | 110°                                                                          |
| Power Requirement         | 100~277VAC                                                                    |
| Power Consumption         | 55w                                                                           |
| Dimmable                  | No                                                                            |
| Housing                   | Diecast aluminium, aluminium lid, steel spigot and arms, toughened glass lens |
| Lifespan                  | >40,000 hours                                                                 |
| Operation Temperature     | -20°C~+45°C                                                                   |
| Product Dimension         | Ø650 x 450mm                                                                  |
| Fits Spigot Size          | Ø76mm pole top                                                                |
| Impact Rating             | IK08                                                                          |
| Weight                    | 10kg                                                                          |
| Protection Rating         | IP65                                                                          |
| Warranty                  | 5 Years                                                                       |

Specifications are subject to change without notice