



200w MultiFiT V3 LED Street Light

Product Features

- 200w
- 2 Colour Adjustable (4000K/5000K)
- Fits 50~60mm spigot size
- Quality Driver
- Full range power input 90~305VAC
- 10KV surge protector
- Aluminium die cast housing
- Supports pole top ($90^\circ \pm 15^\circ$) or spigot mounting ($0^\circ \pm 15^\circ$)
- 150/80° Beam Angle
- PE cell compatible (excludes -N model)
- IP65 Housing
- IK08 Impact Rating
- Weight: 6.9kg




Spigot mounting



Pole top mounting

Options:




PE Cell
(n/a in -N model)



Mounting Poles



Ø36-40mm Spigot
Replacement



Outreach or
Spigot Adaptors



COLOUR SELECT



N14256



SAA APPROVALS



5627




Specification Overview

Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions	Spigot Size
SLM-200W-2C	200w	90~305VAC	4000K/ 5000K	22206lm/ 22116lm	150/80°	Black	693x300x109mm	50~60mm
SLM-200W-2C-N NO NEMA SOCKET MODEL (no ability to add PE Cell) All specifications remain the same as above								

Product Specification



200w MultiFiT V3 LED Street Light

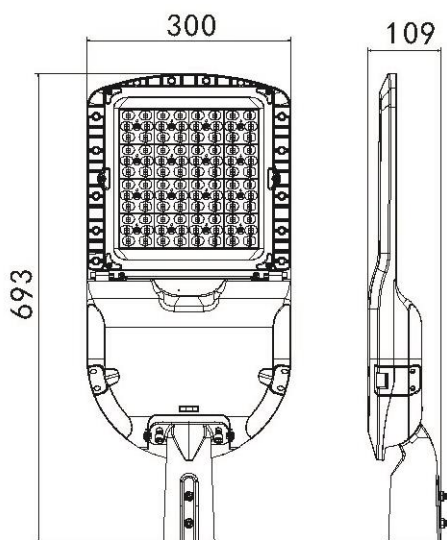

Specification

Model	SLM-200W-2C	SLM-200W-2C-N
NEMA Socket (ability to add PE Cell)	Yes	No
Colour Temperature (2CCT)	4000K or 5000K	
Lumen (lm)	22206lm (4000K) / 22116lm (5000K)	
Efficiency (lm/w)	>111lm/w (4000k) / >110lm/w (5000K)	
Light Source	LED	
CRI (%)	≥80	
Beam Angle	150° / 80°	
Power Requirement	90~305VAC	
Power Consumption	200w	
Dimmable	No	
Housing	Diecast aluminium with tempered glass diffuser	
Lifespan	>40,000 hours	
Operation Temperature	-30°C~+40°C	
Product Dimension	693 x 300 x 109mm (Spigot mount)	
Fits Spigot Size	Ø50 ~ Ø60mm	
Impact Rating	IK08	
Weight	6.9kg	
Protection Rating	IP65	
Warranty	5 Years	

Options:



PE Cell

N/A on -N models
(Model: SLM-PE)




Mounting Poles



Ø36-40mm Spigot Replacement

(Model: SLM-SPIGOT-40)



Outreach or Spigot Adaptors

Specifications are subject to change without notice