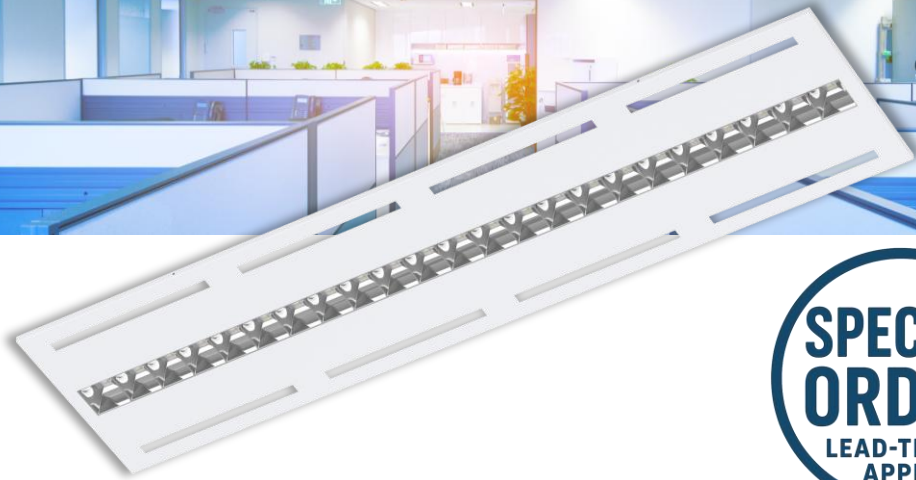


Product Specification



T-Bar Panel Light
400 x 1200 with Air Return



Product Features

- 28w
- 4000K
- Air Return Slots
- Low Glare UGR<19
- Louvered Reflector (Prismatic optional)
- 90° Beam Angle
- 392 x 1192 x 48mm
- IP20 Housing
- IK06 Impact Rating
- Weight: 4.3kg

Options:



Dali Dimmable



Prismatic Diffuser



Specification Overview

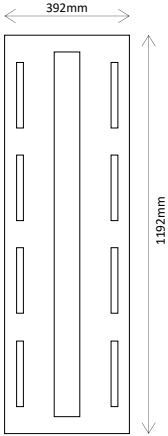


Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
PL-412AR-T	28w	220~240VAC	4000K	2,960lm	90°	White	392 x 1192 x 48mm
PL-412AR-T-P	28w	220~240VAC	4000K	2,890lm	90°	White	392 x 1192 x 48mm

T-Bar Panel Light

400 x 1200 with Air Return

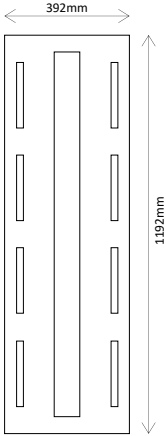
Model	Power	Lumens	CCT	Dimension	Weight
PL-AR412-T	28w	2,960lm	4000K	392 x 1192 x 48mm	4.3kg

Specification				Dimensions
CCT	4000K	Housing	SPCC (Steel)	
Efficacy	>105lm/w	Lens	Polycarbonate	
CRI (%)	≥80	Housing Colour	White	
Beam Angle	90°	Lifespan	>50,000 hours	
Power Input	220~240VAC	Operation Temperature	-10°C to +40°C	
Dimmable	No (Optional)	Glare Rating	UGR<19	
Impact Rating	IK06			
Protection Rating	IP20	Warranty	3 Years	

T-Bar Panel Light

400 x 1200 with Air Return

Model	Power	Lumens	CCT	Dimension	Weight
PL-AR412-T-P	28w	2,890lm	4000K	392 x 1192 x 48mm	4.3kg

Specification				Dimensions
CCT	4000K	Housing	SPCC (Steel)	
Efficacy	>103lm/w	Lens	Polycarbonate	
CRI (%)	≥80	Housing Colour	White	
Beam Angle	90°	Lifespan	>50,000 hours	
Power Input	220~240VAC	Operation Temperature	-10°C to +40°C	
Dimmable	No (Optional)	Glare Rating	UGR<19	
Impact Rating	IK06			
Protection Rating	IP20	Warranty	3 Years	