



300x1200 T-Bar Panel

Product Features

- 33w
- Backlit design ensuring long life and performance
- 3CCT: 3000K/4000K/5000K
- Flicker Free Driver
- Low Glare UGR<22
- 120° Beam Angle
- 295 x 1195 x 25mm
- Rating: IP50
- Weight: 1.6kg

Options:

- 

Surface Mount
Frame Kit
- 

Recessed Ceiling
Frame Kit
- 


Dimmable Driver
Options
- 

Emergency Pack



Model	Watt	Size	CCT	Lumens	Beam Angle	Trim Colour	Weight
PL-30120-3C	33w	295x1195x25mm	3000K/4000K/5000K	3620~4200lm	120°	White	1.6kg
PL-SMFK-30120	Surface Mount Frame Kit to suit 300x1200 T-Bar Panel						
PL-RCF-30120	Recessed Ceiling Frames to suit 300x1200 T-Bar Panel (Bulk Pack 10pcs)						
PL-DPS-33V4	Dimmable Driver to suit 300x1200 T-Bar Panel (suits Trailing, LED or Universal Dimmers)						
PL-DPS-36W-DALI	Dali Dimmable Driver to suit 300x1200 T-Bar Panel (works on Dali System)						
PL-EP-33V4	Emergency Pack to suit 300x1200 T-Bar Panel (turns light into emergency lighting levels should you lose power)						

300x1200 T-Bar Panel

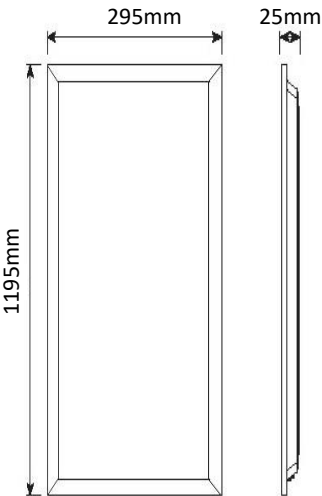

Options:



Surface Mount
Frame Kit
Model: PL-SMFK-30120



Recessed Ceiling
Frame Kit (10 pack only)
Model: PL-RCF-30120



Dimmable Driver Options
Triac Dimming: PL-DPS-33V4
Dali Dimming: PL-DPS-36W-DALI



Emergency Pack
Model: PL-EP-33V4

Specification

Model	PL-30120-3C
Colour Temperature (3CCT)	3000K/4000K/5000K
Lumen (lm)	3620~4200lm
Efficiency (lm/w)	>110lm/w
Light Source	LED
CRI (%)	≥80
Glare Rating	UGR<22
Beam Angle	120°
Power Requirement	220~240VAC, Flicker Free
Power Consumption	33w
Dimmable	No (Optional dimmable drivers available)
Housing	Aluminium
Lifespan	>50,000 hours
Operation Temperature	-10°C~+40°C
Product Dimension	295 x 1195 x 25mm
Weight	1.6kg
Protection Rating	IP50
Warranty	5 Years

Specifications are subject to change without notice