




300x600 T-Bar Panel

Product Features

- 18w
- Backlit design ensuring long life and performance
- 3CCT: 3000K/4000K/5000K
- Flicker Free Driver
- Low Glare UGR<22
- 120° Beam Angle
- 295 x 595 x 25mm
- Rating: IP50
- Weight: 1.2kg

Options:




Surface Mount
Frame Kit




Dimmable Driver




Model	Watt	Size	CCT	Lumens	Beam Angle	Trim Colour	Weight
PL-3060-3C	18w	295x595x25mm	3000K/4000K/5000K	1975~2291lm	120°	White	1.25kg
PL-SMFK-3060	Surface Mount Frame Kit to suit 300x600 T-Bar Panel						
PL-DPS-20V4	Dimmable Driver to suit 600x600 T-Bar Panel (suits Trailing, LED or Universal Dimmers)						



300x600 T-Bar Panel

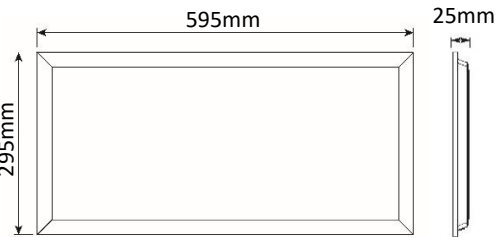

Options:



Surface Mount
Frame Kit
Model: PL-SMFK-3060



Dimmable Driver
Triac Dimming: PL-DPS-20V4

Specification

Model	PL-3060-3C
Colour Temperature (3CCT)	3000K/4000K/5000K
Lumen (lm)	1975~2291lm
Efficiency (lm/w)	>110lm/w
Light Source	LED
CRI (%)	≥80
Glare Rating	UGR<22
Beam Angle	120°
Power Requirement	220~240VAC, Flicker Free
Power Consumption	18w
Dimmable	No (Optional dimmable drivers available)
Housing	Aluminium
Lifespan	>50,000 hours
Operation Temperature	-10°C~+40°C
Product Dimension	295 x 595 x 25mm
Weight	1.2kg
Protection Rating	IP50
Warranty	5 Years

Specifications are subject to change without notice